



Special Cables



PVC Insulation

Multipairs, Twisted in Bundles, Collective Screen 4

Single Pair or Triple, Collective Screen 6

Multipairs, Layers, Collective Screen 7

Multipairs, Layers, Individual and Collective Screen 9

Multipairs, Layers, Collective Screen 10

Multipairs, Layers, Collective Screen 12

Multipairs, Layers, Individual and Collective Screen 13

Multipairs, Layers, Individual and Collective Screen 15

Single Pair, Collective Screen , Galvanized Steel Wire Armour 16

Multipairs, Layers, Collective Screen, Galvanized Steel Wire Armour 17

Multipairs, Layers, Collective Screen, Galvanized Steel Wire Armour 19

Individual and Collective Screen, Galvanized Steel Wire Armour 20

Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour 22

PE Insulation

Multipairs, Twisted in Bundles, Collective Screen 23

Single Pair or Triple, Collective Screen 25

Multipairs, Layers, Collective Screen 26

Multipairs, Layers, Collective Screen 28

Multipairs, Layers, Individual and Collective Screen 29

Multipairs, Layers, Individual and Collective Screen 31

Multipairs, Layers, Collective Screen 32

Multipairs, Layers, Collective Screen 34

Multipairs, Layers, Individual and Collective Screen 35

Multipairs, Layers, Individual and Collective Screen 37

Single Pair, Collective Screen, Galvanized Steel Wire Armour 38

Multipairs, Layers, Collective Screen, Galvanized Steel Wire Armour 39

Multipairs, Layers, Collective Screen Galvanized Steel Wire Armour 41

Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour 42

Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour 44

Multicores, Layers, Overall Screen of Tinned Copper Wire Braid 45

Single Pair, Collective Screen of Tinned Copper Wire Braid 46

Multipairs, Layers, Overall Screen of Tinned Copper Wire Braid 47

Multipairs, Layers, Overall Screen of Plain or Tinned Copper Wire Braid 48

Fire Resistant Cables

Multipairs, Layers, Collective Screen, Stranded Conductor 51

Multipairs, Layers, Collective Screen, Stranded Conductor 53

Multipairs, Layers, Individual and Collective Screen, Stranded Conductor 54

Multipairs, Layers, Individual and Collective Screen, Stranded Conductor 56

Multicores, Unscreened, Stranded Conductor 57

Multipairs, Layers, Collective Screen, Stranded Conductor 58

Multicores, Unscreened, Solid Conductor 59



Multipairs, Layers, Collective Screen, Solid Conductor.....	60
Multicores, Unscreened, Flexible Conductor.....	61
Multipairs, Layers, Collective Screen, Flexible Conductor.....	62
Solid Copper Conductors	
PVC Insulation, PVC Sheathed	63
Stranded Copper Conductors	
PVC Insulation, PVC Sheathed	64
PVC Insulation, Copper Tape Screened, PVC Sheathed.....	65
PVC Insulation, Copper Tape Screened, PVC Sheathed.....	66
PVC Insulation, Steel Tape Armoured, PVC Sheathed.....	67
PVC Insulation, Steel Tape Armoured, PVC Sheathed.....	68
PVC Insulation, Steel Wire Armoured, PVC Sheathed.....	69
PVC Insulation, Steel Wire Armoured, PVC Sheathed.....	70
PVC Insulation, Steel Wire Armoured, PVC Sheathed.....	71
PVC Insulation, Steel Wire Armoured, PVC Sheathed.....	72
Unscreened Twisted Pairs (UTP)	
Data Cable - Category 5e	73
Foil Screened Twisted Pairs (STP)	
Data Cable - Category 5e	74
Unscreened Twisted Pairs (UTP)	
Data Cable - Category 6.....	75
Telephone Cable	
PVC Insulated Multipairs.....	76
PVC Insulated Multipairs.....	77
PVC Insulated Multipairs.....	78
Coaxial Cables	
MATV Cables	80
MATV Cables	81
RG Cables.....	82
RG Cables.....	83
Automotive Wires	
PVC Insulation.....	84
Heat - Resistant PVC Insulation.....	85
Heat - Pressure Resistant PVC Insulation	86
Cold - Resistant PVC Insulation.....	87
Concentric Conductors with PVC Insulation.....	88
PVC Thin Insulation	89
Flexible PVC Cables	
HO5VV-F.....	90
HO3VV-F.....	91
Flat Cords	
By To Multiply By To obtain.....	104

Multipairs, Twisted in Bundles, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form pairs, 4 pairs twisted to form a bundle, bundles twisted in concentric layers, 2 pairs twisted as star quad

Colour code:

One Pair : Blue / Red

Two Pairs : Grey / Yellow

Three Pairs : Green / Brown

Four Pairs : White / Black

Bundles are identified by coloured polyester Tapes.

Wrapping:

Polyester tapes

Collective Screen:

Aluminum polyester tape with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or grey or blue

Minimum bending radius:

7.5*d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No. x dia.	Max. DC Res. At 20°C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	7.9	80
	4	7 x 0.3	39.2	0.6	1	10.1	100
	8	7 x 0.3	39.2	0.6	1	12.1	160
	12	7 x 0.3	39.2	0.6	1.2	14.4	230
	16	7 x 0.3	39.2	0.6	1.2	16.1	300
	20	7 x 0.3	39.2	0.6	1.2	18.5	360



PVC Insulation

	24	7 x 0.3	39.2	0.6	1.4	20.3	450
1	2	7 x 0.43	18.4	0.6	1	8.9	100
	4	7 x 0.43	18.4	0.6	1	12	160
	8	7 x 0.43	18.4	0.6	1.2	16	300
	12	7 x 0.43	18.4	0.6	1.4	20	430
	16	7 x 0.43	18.4	0.6	1.4	22	550
	20	7 x 0.43	18.4	0.6	1.4	24.3	660
	24	7 x 0.43	18.4	0.6	1.6	26.7	800

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Single Pair or Triple, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

cores twisted to form a pair or triple and wrapped by polyester tapes

Colour code:

Pair : White / Black

Triple : Black / White / Red

Screen:

Collective screen aluminum polyester tape with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or grey or blue

Minimum bending radius:

7.5*d (d= overall diameter)

Temperature rating:

+5oC up to + 50oC during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Cable Size	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Max. DC Res. At 20° C				
mm ²	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1x 2 x 0.5	7 x 0.3	39.2	0.6	0.8	6	50
1x 3 x 0.5	7 x 0.3	39.2	0.6	0.8	6.3	60
1x 2 x 0.75	7 x 0.37	24.6	0.6	0.8	6.4	60
1x 3 x 0.75	7 x 0.37	24.6	0.6	0.8	6.7	70
1x 2 x 1.0	7 x 0.43	18.4	0.6	0.8	6.8	70
1x 3 x 1.0	7 x 0.43	18.4	0.6	0.8	7.1	80
1x 2 x 1.3	7 x 0.49	14.2	0.6	0.8	7.1	80
1x 3 x 1.3	7 x 0.49	14.2	0.6	0.8	7.4	90
1x 2 x 1.5	7 x 0.53	12.6	0.6	0.8	7.6	90
1x 3 x 1.5	7x 0.53	12.6	0.6	0.8	8	110

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Multipairs, Layers, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form pairs, twisted pairs in concentric layers and wrapped by polyester tapes

Colour code:

Black / White, continuously numbered, or identification tapes numbered

Collective Screen:

Aluminium polyester tape with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or grey or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+50C up to + 50oC during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	10.3	122
	4	7 x 0.3	39.2	0.6	1	11.1	140
	8	7 x 0.3	39.2	0.6	1.2	14.7	240
	12	7 x 0.3	39.2	0.6	1.3	17	340
	16	7 x 0.3	39.2	0.6	1.3	18.9	433
	20	7 x 0.3	39.2	0.6	1.3	21	518
	24	7 x 0.3	39.2	0.6	1.5	23.7	636
	30	7 x 0.3	39.2	0.6	1.5	26.3	867



PVC Insulation

0.75	2	7 x 0.37	24.6	0.6	1	11.2	149
	4	7 x 0.37	24.6	0.6	1	11.9	165
	8	7 x 0.37	24.6	0.6	1.2	15.8	291
	12	7 x 0.37	24.6	0.6	1.3	18.3	409
	16	7 x 0.37	24.6	0.6	1.3	20.4	523
	20	7 x 0.37	24.6	0.6	1.3	22.8	631
	24	7 x 0.37	24.6	0.6	1.5	25.7	770
	30	7 x 0.37	24.6	0.6	1.7	26.4	902



PVC Insulation

Multipairs, Layers, Individual and Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No. x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.0	2	7 x 0.43	18.4	0.6	1.2	12.2	172
	4	7 x 0.43	18.4	0.6	1.2	13.1	201
	8	7 x 0.43	18.4	0.6	1.3	17.2	351
	12	7 x 0.43	18.4	0.6	1.3	19.7	486
	16	7 x 0.43	18.4	0.6	1.3	21.9	626
	20	7 x 0.43	18.4	0.6	1.5	25.0	670
	24	7 x 0.43	18.4	0.6	1.5	27.6	923
	30	7 x 0.43	18.4	0.6	1.7	30.5	1253
1.3	2	7 x 0.49	14.2	0.6	1.2	12.8	195
	4	7 x 0.49	14.2	0.6	1.3	14.0	245
	8	7 x 0.49	14.2	0.6	1.3	18.2	425
	12	7 x 0.49	14.2	0.6	1.3	20.3	615
	16	7 x 0.49	14.2	0.6	1.5	23.2	790
	20	7 x 0.49	14.2	0.6	1.5	27.0	880
	24	7 x 0.49	14.2	0.6	1.7	31.2	1100
	30	7 x 0.49	14.2	0.6	2.0	34.5	1450
1.5	2	7 x 0.53	12.6	0.6	1.2	14.1	228
	4	7 x 0.53	12.6	0.6	1.2	15.4	273
	8	7 x 0.53	12.6	0.6	1.3	20.3	480
	12	7 x 0.53	12.6	0.6	1.5	24.0	700
	16	7 x 0.53	12.6	0.6	1.5	26.7	904
	20	7 x 0.53	12.6	0.6	1.7	30.2	1119
	24	7 x 0.53	12.6	0.6	2.0	34.0	1370
	30	7 x 0.53	12.6	0.6	2.2	37.4	1845

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Multitriples, Layers, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form triples, twisted triples in concentric layers, and wrapped by polyester tapes.

Colour code:

Black / White / Red, continuously numbered, or identification tapes numbered

Wrapping:

Polyester tapes

Collective Screen

Aluminum polyester tape with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or grey or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to +50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No. x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1.0	10.1	125
	4	7 x 0.3	39.2	0.6	1.0	10.8	150
	8	7 x 0.3	39.2	0.6	1.2	14.6	245
	12	7 x 0.3	39.2	0.6	1.3	16.5	347
	16	7 x 0.3	39.2	0.6	1.3	18.7	450
	20	7 x 0.3	39.2	0.6	1.3	21.2	565
	24	7 x 0.3	39.2	0.6	1.5	24.0	670
	30	7 x 0.3	39.2	0.6	1.5	27.7	975



PVC Insulation

0.75	2	7 x 0.37	24.6	0.6	1.0	10.9	145
	4	7 x 0.37	24.6	0.6	1.0	11.8	190
	8	7 x 0.37	24.6	0.6	1.3	15.9	375
	12	7 x 0.37	24.6	0.6	1.3	17.9	435
	16	7 x 0.37	24.6	0.6	1.3	20.2	535
	20	7 x 0.37	24.6	0.6	1.5	23.8	675
	24	7 x 0.37	24.6	0.6	1.5	26.0	970
	30	7 x 0.37	24.6	0.6	1.7	30.0	1175

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Multitriples, Layers, Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.No. x	Max. DC Res. At 20° C				
mm ²	No.	mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	12.1	170
	4	7 x 0.43	18.4	0.6	1.2	13.6	255
	8	7 x 0.43	18.4	0.6	1.3	17.6	430
	12	7 x 0.43	18.4	0.6	1.3	20.3	590
	16	7 x 0.43	18.4	0.6	1.3	22.8	750
	20	7 x 0.43	18.4	0.6	1.5	25.6	930
	24	7 x 0.43	18.4	0.6	1.5	27.6	1090
1.3	2	7 x 0.49	14.2	0.6	1.2	12.8	200
	4	7 x 0.49	14.2	0.6	1.3	14.4	295
	8	7 x 0.49	14.2	0.6	1.3	18.8	510
	12	7 x 0.49	14.2	0.6	1.3	21.7	710
	16	7 x 0.49	14.2	0.6	1.5	25	930
	20	7 x 0.49	14.2	0.6	1.5	27.4	1130
	24	7 x 0.49	14.2	0.6	1.7	29.6	1335
1.5	2	7 x 0.53	12.6	0.6	1.2	14	230
	4	7 x 0.53	12.6	0.6	1.3	15.9	325
	8	7 x 0.53	12.6	0.6	1.3	20.8	570
	12	7 x 0.53	12.6	0.6	1.5	24.8	810
	16	7 x 0.53	12.6	0.6	1.5	27.9	1120
	20	7 x 0.53	12.6	0.6	1.7	30.7	1280
	24	7 x 0.53	12.6	0.6	2	33.1	1515
	30	7 x 0.53	12.6	0.6	2.2	37.3	1960

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Multitriples, Layers, Individual and Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form triples, triples screened by aluminum polyester tapes, screened triples twisted in concentric layers, and wrapped by polyester tapes

Colour code:

Black / White / Red, continuously numbered, or identification tapes numbered

Wrapping:

Polyester tapes

Collective Screen

Aluminum polyester tape with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or grey or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	11.7	150
	4	7 x 0.3	39.2	0.6	1.2	13.2	205
	8	7 x 0.3	39.2	0.6	1.3	17	335
	12	7 x 0.3	39.2	0.6	1.3	19.6	450
	16	7 x 0.3	39.2	0.6	1.3	22	575
	20	7 x 0.3	39.2	0.6	1.5	24.7	710



PVC Insulation

	24	7 x 0.3	39.2	0.6	1.5	26.6	835
	30	7 x 0.3	39.2	0.6	1.7	29.2	1130
0.75	2	7 x 0.37	24.6	0.6	1	12.5	165
	4	7 x 0.37	24.6	0.6	1.2	14.1	235
	8	7 x 0.37	24.6	0.6	1.3	18.3	395
	12	7 x 0.37	24.6	0.6	1.3	21.1	550
	16	7 x 0.37	24.6	0.6	1.5	24.2	720
	20	7 x 0.37	24.6	0.6	1.7	26.7	875
	24	7 x 0.37	24.6	0.6	1.7	28.8	1030
	30	7 x 0.37	24.6	0.6	2	32.4	1325



PVC Insulation

Multitriples, Layers, Individual and Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of Triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	13.7	195
	4	7 x 0.43	18.4	0.6	1.3	15.5	285
	8	7 x 0.43	18.4	0.6	1.3	20.3	480
	12	7 x 0.43	18.4	0.6	1.5	23.5	665
	16	7 x 0.43	18.4	0.6	1.5	27.1	880
	20	7 x 0.43	18.4	0.6	1.7	29.8	1060
	24	7 x 0.43	18.4	0.6	1.7	32.2	1250
	30	7 x 0.43	18.4	0.6	2	35.3	1530
1.3	2	7 x 0.49	14.2	0.6	1.3	14.4	230
	4	7 x 0.49	14.2	0.6	1.3	16.4	330
	8	7 x 0.49	14.2	0.6	1.3	21.6	565
	12	7 x 0.49	14.2	0.6	1.5	25.6	810
	16	7 x 0.49	14.2	0.6	1.7	28.9	1050
	20	7 x 0.49	14.2	0.6	1.7	31.8	1270
	24	7 x 0.49	14.2	0.6	2	35.4	1525
	30	7 x 0.49	14.2	0.6	2.2	37.2	1730
1.5	2	7 x 0.53	12.6	0.6	1.3	15.2	265
	4	7 x 0.53	12.6	0.6	1.3	17.3	365
	8	7 x 0.53	12.6	0.6	1.3	22.9	610
	12	7 x 0.53	12.6	0.6	1.5	27.2	935
	16	7 x 0.53	12.6	0.6	1.7	30.7	1180
	20	7 x 0.53	12.6	0.6	2	33.8	1430
	24	7 x 0.53	12.6	0.6	2.2	37	1710
	30	7 x 0.53	12.6	0.6	2.2	40.6	2200

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Single Pair, Collective Screen, Galvanized Steel Wire Armour

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride TI1 to BS 6746

Assembly:

cores twisted to form a pair and screened by Aluminum Polyester tape with tinned drain wire and wrapped by polyester tapes

Colour code:

Black / White

Screen:

Collective screen of aluminium polyester tapes with tinned drain wire and wrapped by polyester tapes

Bedding:

Polyvinylchloride

Armouring:

Galvanized steel wire armour to BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.No. x	Max. DC Res. At 20°C					
mm ²	No.	mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
0.5	1	7 x 0.3	39.2	0.6	0.8	1.3	10.7	219
0.75	1	7 x 0.37	24.6	0.6	0.8	1.3	11	240
1	1	7 x 0.43	18.4	0.6	0.8	1.3	11.4	255
1.3	1	7 x 0.49	14.2	0.6	0.8	1.4	11.8	275
1.5	1	7 x 0.53	12.6	0.6	0.8	1.4	12.6	300

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Multipairs, Layers, Collective Screen, Galvanized Steel

Wire Armour

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form a pairs, pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or identification tapes

numbered

Screen:

Collective screen of aluminium polyester tape with tinned drain wire and wrapped by polyester tapes

Bedding:

Polyvinylchloride

Armouring;

Galvanized steel wire armour to BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km



PVC Insulation

0.5	2	7 x 0.3	39.2	0.6	0.8	1.4	13.5	344
	4	7 x 0.3	39.2	0.6	0.8	1.4	14.6	395
	8	7 x 0.3	39.2	0.6	1.25	1.5	18.7	665
	12	7 x 0.3	39.2	0.6	1.25	1.6	20.7	800
	16	7 x 0.3	39.2	0.6	1.25	1.6	22.4	920
	20	7 x 0.3	39.2	0.6	1.6	1.7	25.3	1220
	24	7 x 0.3	39.2	0.6	1.6	1.7	27.2	1370
	30	7 x 0.3	39.2	0.6	1.6	1.9	30.1	1710
0.75	2	7 x 0.37	24.6	0.6	0.8	1.5	15.6	395
	4	7 x 0.37	24.6	0.6	0.8	1.5	16.7	440
	8	7 x 0.37	24.6	0.6	1.25	1.6	21.5	760
	12	7 x 0.37	24.6	0.6	1.25	1.7	24.9	905
	16	7 x 0.37	24.6	0.6	1.6	1.7	27.0	1240
	20	7 x 0.37	24.6	0.6	1.6	1.8	29.6	1390
	24	7 x 0.37	24.6	0.6	1.6	1.9	32.7	1580
	30	7 x 0.37	24.6	0.6	1.6	2.0	36.1	1800

Multipairs, Layers, Collective Screen, Galvanized Steel Wire Armour

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max.DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	0.8	1.5	15.2	440
	4	7 x 0.43	18.4	0.6	0.8	1.5	16.4	490
	8	7 x 0.43	18.4	0.6	1.25	1.6	21.1	840
	12	7 x 0.43	18.4	0.6	1.6	1.7	24.4	1200
	16	7 x 0.43	18.4	0.6	1.6	1.7	26.4	1380
	20	7 x 0.43	18.4	0.6	1.6	1.8	28.8	1580
	24	7 x 0.43	18.4	0.6	1.6	1.9	31.8	1850
	30	7 x 0.43	18.4	0.6	2	2	35	2470
1.3	2	7 x 0.49	14.2	0.6	0.8	1.5	15.6	460
	4	7 x 0.49	14.2	0.6	1.25	1.5	18.1	630
	8	7 x 0.49	14.2	0.6	1.25	1.6	22.2	900
	12	7 x 0.49	14.2	0.6	1.6	1.7	25.3	1290
	16	7 x 0.49	14.2	0.6	1.6	1.8	28.1	1510
	20	7 x 0.49	14.2	0.6	1.6	1.8	30.4	1660
	24	7 x 0.49	14.2	0.6	1.6	1.9	32.5	1970
	30	7 x 0.49	14.2	0.6	2	2	35.9	2420
1.5	2	7 x 0.53	12.6	0.6	1.25	1.6	18.2	620
	4	7 x 0.53	12.6	0.6	1.25	1.6	19.7	745
	8	7 x 0.53	12.6	0.6	1.6	1.7	25.2	1230
	12	7 x 0.53	12.6	0.6	1.6	1.8	28.1	1520
	16	7 x 0.53	12.6	0.6	1.6	1.9	31.3	1865
	20	7 x 0.53	12.6	0.6	1.6	1.9	34.1	2140
	24	7 x 0.53	12.6	0.6	2	2	38.3	2740
	30	7 x 0.53	12.6	0.6	2	2	41.6	3340

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation

Individual and Collective Screen, Galvanized Steel Wire

Armour

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride T11 to BS 6746

Assembly:

Cores twisted to form a pairs, pairs screened by aluminium polyester tapes, screened pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Bedding:

Polyvinylchloride

Armouring;

Galvanized steel wire armour to BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden dru



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	0.8	1.4	14.7	390
	4	7 x 0.3	39.2	0.6	0.8	1.5	15.9	450
	8	7 x 0.3	39.2	0.6	1.25	1.6	20.4	760



PVC Insulation

	12	7 x 0.3	39.2	0.6	1.25	1.6	22.7	940
	16	7 x 0.3	39.2	0.6	1.6	1.7	25.5	1260
	20	7 x 0.3	39.2	0.6	1.6	1.8	27.8	1420
	24	7 x 0.3	39.2	0.6	1.6	1.9	30.7	1660
	30	7 x 0.3	39.2	0.6	1.6	1.9	33.0	2015
0.75	2	7 x 0.37	24.6	0.6	0.8	1.5	15.6	440
	4	7 x 0.37	24.6	0.6	0.8	1.5	16.7	490
	8	7 x 0.37	24.6	0.6	1.25	1.6	21.5	850
	12	7 x 0.37	24.6	0.6	1.6	1.7	24.9	1210
	16	7 x 0.37	24.6	0.6	1.6	1.7	27.0	1390
	20	7 x 0.37	24.6	0.6	1.6	1.8	29.6	1620
	24	7 x 0.37	24.6	0.6	1.6	1.9	32.7	1880
	30	7 x 0.37	24.6	0.6	2	2.0	36.1	2590

Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.25	1.5	17.2	570
	4	7 x 0.43	18.4	0.6	1.25	1.5	18.6	660
	8	7 x 0.43	18.4	0.6	1.25	1.7	23.1	960
	12	7 x 0.43	18.4	0.6	1.6	1.7	26.3	1335
	16	7 x 0.43	18.4	0.6	1.6	1.8	28.7	1570
	20	7 x 0.43	18.4	0.6	1.6	1.9	32	1870
	24	7 x 0.43	18.4	0.6	1.6	1.9	34.6	2120
	30	7 x 0.43	18.4	0.6	2	2.1	38.3	2830
1.3	2	7 x 0.49	14.2	0.6	1.25	1.5	18.2	680
	4	7 x 0.49	14.2	0.6	1.25	1.6	20.3	850
	8	7 x 0.49	14.2	0.6	1.6	1.7	26.4	1350
	12	7 x 0.49	14.2	0.6	1.6	1.8	29.5	1560
	16	7 x 0.49	14.2	0.6	1.6	1.9	32	1860
	20	7 x 0.49	14.2	0.6	2	2	36.6	2300
	24	7 x 0.49	14.2	0.6	2	2.1	39.3	3200
	30	7 x 0.49	14.2	0.6	2	2.2	44.2	3900
1.5	2	7 x 0.53	12.6	0.6	1.25	1.7	22.8	1000
	4	7 x 0.53	12.6	0.6	1.25	1.7	24.1	1130
	8	7 x 0.53	12.6	0.6	1.6	1.8	30.4	1690
	12	7 x 0.53	12.6	0.6	1.6	1.9	34.1	2130
	16	7 x 0.53	12.6	0.6	1.6	2	38.7	2280
	20	7 x 0.53	12.6	0.6	2	2.2	43.3	3430
	24	7 x 0.53	12.6	0.6	2	2.3	48.5	4420
	30	7 x 0.53	12.6	0.6	2.5	2.5	52.8	5390

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

Multipairs, Twisted in Bundles, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene type 03 to BS 6234

Assembly:

Cores twisted to form pairs, 4 pairs twisted to form a bundle, bundles twisted in concentric layers, 2 pairs twisted as star quad

Colour code:

One Pair : Blue / Red

Two Pairs : Grey / Yellow

Three Pairs : Green / Brown

Four Pairs : White / Black

Bundles are identified by coloured polyester tapes

Wrapping:

Polyester tapes

Collective Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Pairs	Conductor		Nominal Insulation Thickness	Nominal Sheath Thickness	Approximate Overall Diameter	Approximate Net Weight
		No. x dia	Max. DC Res.At 20°				
mm ²	No.	No. x mm	Ohm/ Km	mm	mm	mm	Kg/Km
0.5	2	7 X 0.3	39.2	0.6	1	6.9	65
	4	7 X 0.3	39.2	0.6	1	9.1	85
	8	7 X 0.3	39.2	0.6	1	11.1	140
	12	7 X 0.3	39.2	0.6	1.2	13.4	195
	16	7 X 0.3	39.2	0.6	1.2	15.1	260
	20	7 X 0.3	39.2	0.6	1.2	16.5	340
	24	7 X 0.3	39.2	0.6	1.4	18.3	430



PE Insulation

1	2	7 X 0.43	18.4	0.6	1	8.9	85
	4	7 X 0.43	18.4	0.6	1	12	140
	8	7 X 0.43	18.4	0.6	1.2	16	165
	12	7 X 0.43	18.4	0.6	1.4	20	390
	16	7 X 0.43	18.4	0.6	1.4	22	500
	20	7 X 0.43	18.4	0.6	1.4	24	640
	24	7 X 0.43	18.4	0.6	1.6	26	780

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PE Insulation

Single Pair or Triple, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-2

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene type 03 to BS 6234

Assembly:

Cores twisted to form a pair or triple and wrapped by polyester tape

Colour code:

Pair: Black / White

Triple: Black / White / Red

Wrapping:

Polyester tapes

Collective Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to +50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Cable Size	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Max. DC Res. At 20° C				
mm ²	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1 x 2 x 0.5	7 x 0.3	39.2	0.6	0.8	5.3	40
1 x 3 x 0.5	7 x 0.3	39.2	0.6	0.8	5.6	50
1 x 2 x 0.75	7 x 0.37	24.6	0.6	0.8	6.4	56
1 x 3 x 0.75	7 x 0.37	24.6	0.6	0.8	6.7	65
1 x 2 x 1.0	7 x 0.43	18.4	0.6	0.8	6.8	66
1 x 3 x 1.0	7 x 0.43	18.4	0.6	0.8	7.1	75
1 x 2 x 1.3	7 x 0.49	14.2	0.6	0.8	7.1	75
1 x 3 x 1.3	7 x 0.49	14.2	0.6	0.8	7.4	85
1 x 2 x 1.5	7 x 0.53	12.6	0.6	0.8	7.6	85
1 x 3 x 1.5	7 x 0.53	12.6	0.6	0.8	8	104

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

www.cncuxc.com

Add: INDUSTRIAL PARK, GONGYI, HENAN, P. R. CHINA / Code: 450042

Tel.: 0086-371- 5508-3768 / Fax: 0086-371- 5508-3768

* HNXC--- TRANS MORE *



PE Insulation

Multipairs, Layers, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene T11 to BS 6746

Assembly:

Cores twisted to form a pairs,pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20oC				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	9.3	98
	4	7 x 0.3	39.2	0.6	1	10	112
	8	7 x 0.3	39.2	0.6	1.2	13.2	189
	12	7 x 0.3	39.2	0.6	1.2	15	252
	16	7 x 0.3	39.2	0.6	1.2	16.7	318
	20	7 x 0.3	39.2	0.6	1.3	18.7	387
	24	7 x 0.3	39.2	0.6	1.3	20.6	452
	30	7 x 0.3	39.2	0.6	1.5	23.3	640



XETH

PE Insulation

0.75	2	7 x 0.37	24.6	0.6	1	10.1	120
	4	7 x 0.37	24.6	0.6	1	10.8	134
	8	7 x 0.37	24.6	0.6	1.2	14.3	232
	12	7 x 0.37	24.6	0.6	1.2	16.3	315
	16	7 x 0.37	24.6	0.6	1.3	18.3	410
	20	7 x 0.37	24.6	0.6	1.3	20.3	490
	24	7 x 0.37	24.6	0.6	1.3	22.5	575
	30	7 x 0.37	24.6	0.6	1.5	24.3	683

www.cncuxc.com

Add: INDUSTRIAL PARK, GONGYI, HENAN, P. R. CHINA / Code: 450042

Tel.: 0086-371- 5508-3768 / Fax: 0086-371- 5508-3768

* HNXC--- **TRANS MORE** *



Multipairs, Layers, Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1	10.8	138
	4	7 x 0.43	18.4	0.6	1	11.6	160
	8	7 x 0.43	18.4	0.6	1.2	15.4	282
	12	7 x 0.43	18.4	0.6	1.3	17.8	396
	16	7 x 0.43	18.4	0.6	1.3	19.8	504
	20	7 x 0.43	18.4	0.6	1.3	22	608
	24	7 x 0.43	18.4	0.6	1.5	24.8	745
1.3	2	7 x 0.49	14.2	0.6	1	11.7	152
	4	7 x 0.49	14.2	0.6	1.2	13.3	215
	8	7 x 0.49	14.2	0.6	1.3	16.5	360
	12	7 x 0.49	14.2	0.6	1.3	19.3	385
	16	7 x 0.49	14.2	0.6	1.3	21.7	575
	20	7 x 0.49	14.2	0.6	1.5	24.2	780
	24	7 x 0.49	14.2	0.6	1.7	26.3	930
1.5	2	7 x 0.53	12.6	0.6	1.2	12.9	194
	4	7 x 0.53	12.6	0.6	1.2	14.1	233
	8	7 x 0.53	12.6	0.6	1.3	18.6	405
	12	7 x 0.53	12.6	0.6	1.3	21.3	564
	16	7 x 0.53	12.6	0.6	1.5	24.3	797
	20	7 x 0.53	12.6	0.6	1.5	27.1	912
	24	7 x 0.53	12.6	0.6	1.7	30.3	1104
	30	7 x 0.53	12.6	0.6	2	33.7	1507

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PE Insulation

Multipairs, Layers, Individual and Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded plain annealed copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form a pairs, pairs screened by Aluminium Polyester tapes, Screened pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or identification tapes numbered

Screen:

Collective screen of Aluminum Polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	10.3	118
	4	7 x 0.3	39.2	0.6	1	11.1	136
	8	7 x 0.3	39.2	0.6	1.2	14.7	234
	12	7 x 0.3	39.2	0.6	1.3	17	325
	16	7 x 0.3	39.2	0.6	1.3	18.9	413
	20	7 x 0.3	39.2	0.6	1.3	21	495
	24	7 x 0.3	39.2	0.6	1.5	23.7	606
	30	7 x 0.3	39.2	0.6	1.5	26.3	822



PE Insulation

0.75	2	7 x 0.37	24.6	0.6	1	11.2	145
	4	7 x 0.37	24.6	0.6	1	11.9	159
	8	7 x 0.37	24.6	0.6	1.2	15.8	280
	12	7 x 0.37	24.6	0.6	1.3	18.3	390
	16	7 x 0.37	24.6	0.6	1.3	20.4	500
	20	7 x 0.37	24.6	0.6	1.3	22.8	602
	24	7 x 0.37	24.6	0.6	1.5	25.7	736
	30	7 x 0.37	24.6	0.6	1.7	26.4	864

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multipairs, Layers, Individual and Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	12.2	170
	4	7 x 0.43	18.4	0.6	1.2	13.1	195
	8	7 x 0.43	18.4	0.6	1.3	17.2	340
	12	7 x 0.43	18.4	0.6	1.3	19.7	465
	16	7 x 0.43	18.4	0.6	1.3	21.9	600
	20	7 x 0.43	18.4	0.6	1.5	25	645
	24	7 x 0.43	18.4	0.6	1.5	27.6	880
1.3	2	7 x 0.49	14.2	0.6	1.2	12.8	180
	4	7 x 0.49	14.2	0.6	1.3	14	230
	8	7 x 0.49	14.2	0.6	1.3	18.2	410
	12	7 x 0.49	14.2	0.6	1.3	20.3	590
	16	7 x 0.49	14.2	0.6	1.5	23.3	760
	20	7 x 0.49	14.2	0.6	1.5	27	850
	24	7 x 0.49	14.2	0.6	1.7	31.2	1065
1.5	2	7 x 0.53	12.6	0.6	1.2	14.1	220
	4	7 x 0.53	12.6	0.6	1.2	15.4	263
	8	7 x 0.53	12.6	0.6	1.3	20.3	460
	12	7 x 0.53	12.6	0.6	1.5	24	670
	16	7 x 0.53	12.6	0.6	1.5	26.7	865
	20	7 x 0.53	12.6	0.6	1.7	30.2	1070
	24	7 x 0.53	12.6	0.6	2	34	1300
	30	7 x 0.53	12.6	0.6	2.2	37.4	1750

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PE Insulation

Multitriples, Layers, Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded plain annealed copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form a triples, triples twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White/ Red continuously numbered, or

identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of Triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm/Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	10.1	115
	4	7 x 0.3	39.2	0.6	1	10.8	135
	8	7 x 0.3	39.2	0.6	1.2	14.6	230
	12	7 x 0.3	39.2	0.6	1.3	16.5	330
	16	7 x 0.3	39.2	0.6	1.3	18.7	420
	20	7 x 0.3	39.2	0.6	1.3	21.2	535
	24	7 x 0.3	39.2	0.6	1.5	24	635



PE Insulation

	30	7 x 0.3	39.2	0.6	1.5	27.7	960
0.75	2	7 x 0.37	24.6	0.6	1	10.9	130
	4	7 x 0.37	24.6	0.6	1	11.8	175
	8	7 x 0.37	24.6	0.6	1.3	15.9	355
	12	7 x 0.37	24.6	0.6	1.3	17.9	415
	16	7 x 0.37	24.6	0.6	1.3	20.2	515
	20	7 x 0.37	24.6	0.6	1.5	23.8	645
	24	7 x 0.37	24.6	0.6	1.5	26	955
	30	7 x 0.37	24.6	0.6	1.7	30	1150

Multitriples, Layers, Collective Screen

TECHNICAL INFORMATION

Conductor size	Number of Triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	12.1	160
	4	7 x 0.43	18.4	0.6	1.2	13.6	240
	8	7 x 0.43	18.4	0.6	1.3	17.6	420
	12	7 x 0.43	18.4	0.6	1.3	20.3	570
	16	7 x 0.43	18.4	0.6	1.3	22.8	730
	20	7 x 0.43	18.4	0.6	1.5	25.6	900
	24	7 x 0.43	18.4	0.6	1.5	27.6	1050
	30	7 x 0.43	18.4	0.6	1.7	33.2	1295
1.3	2	7 x 0.49	14.2	0.6	1.2	12.8	190
	4	7 x 0.49	14.2	0.6	1.3	14.4	275
	8	7 x 0.49	14.2	0.6	1.3	18.8	485
	12	7 x 0.49	14.2	0.6	1.3	21.7	685
	16	7 x 0.49	14.2	0.6	1.5	25	910
	20	7 x 0.49	14.2	0.6	1.5	27.4	1100
	24	7 x 0.49	14.2	0.6	1.7	29.6	1300
	30	7 x 0.49	14.2	0.6	2	35.6	1590
1.5	2	7 x 0.53	12.6	0.6	1.2	14	220
	4	7 x 0.53	12.6	0.6	1.3	15.9	300
	8	7 x 0.53	12.6	0.6	1.3	20.8	545
	12	7 x 0.53	12.6	0.6	1.5	24.8	785
	16	7 x 0.53	12.6	0.6	1.5	27.9	1100
	20	7 x 0.53	12.6	0.6	1.7	30.7	1250
	24	7 x 0.53	12.6	0.6	2	33.1	1460
	30	7 x 0.53	12.6	0.6	2.2	37.3	1920

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PE Insulation

Multitriples, Layers, Individual and Collective Screen

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form triples, triples screened by aluminium by polyester tapes, screened triples Twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White/ Red, continuously numbered or identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of triples	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No. x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	11.7	145
	4	7 x 0.3	39.2	0.6	1.2	13.2	195
	8	7 x 0.3	39.2	0.6	1.3	17	320
	12	7 x 0.3	39.2	0.6	1.3	19.6	430
	16	7 x 0.3	39.2	0.6	1.3	22	560
	20	7 x 0.3	39.2	0.6	1.5	24.7	680
	24	7 x 0.3	39.2	0.6	1.5	26.6	800
	30	7 x 0.3	39.2	0.6	1.7	29.2	1100



PE Insulation

0.75	2	7 x 0.37	24.6	0.6	1	12.5	160
	4	7 x 0.37	24.6	0.6	1.2	14.1	220
	8	7 x 0.37	24.6	0.6	1.3	18.3	380
	12	7 x 0.37	24.6	0.6	1.3	21.1	530
	16	7 x 0.37	24.6	0.6	1.5	24.2	690
	20	7 x 0.37	24.6	0.6	1.7	26.7	845
	24	7 x 0.37	24.6	0.6	1.7	28.8	1000
	30	7 x 0.37	24.6	0.6	2	32.4	1300

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multitriples, Layers, Individual and Collective Screen

TECHNICAL INFORMATION

Conductor Size	Number of Triples	Conductor		Nominal Insulation Thickness	Nominal Sheath Thickness	Approximate Overall Diameter	Approximate Net Weight
		No. x dia	Max. DC Res. At 20°				
mm ²	.No	No. x mm	Ohm/ Km	mm	mm	mm	Kg/Km
1	2	7 X 0.43	18.4	0.6	1.2	13.7	185
	4	7 X 0.43	18.4	0.6	1.3	15.5	270
	8	7 X 0.43	18.4	0.6	1.3	20.3	465
	12	7 X 0.43	18.4	0.6	1.3	23.5	650
	16	7 X 0.43	18.4	0.6	1.5	27.1	850
	20	7 X 0.43	18.4	0.6	1.7	29.8	1030
	24	7 X 0.43	18.4	0.6	1.7	32.2	1220
	30	7 X 0.43	18.4	0.6	2	35.3	1480
1.3	2	7 X 0.49	14.2	0.6	1.3	14.4	220
	4	7 X 0.49	14.2	0.6	1.3	16.4	310
	8	7 X 0.49	14.2	0.6	1.3	21.6	540
	12	7 X 0.49	14.2	0.6	1.5	25.6	780
	16	7 X 0.49	14.2	0.6	1.7	28.9	1010
	20	7 X 0.49	14.2	0.6	1.7	31.8	1190
	24	7 X 0.49	14.2	0.6	2	35.4	1475
	30	7 X 0.49	14.2	0.6	2	37.2	1680
1.5	2	7 X 0.53	12.6	0.6	1.3	15.2	255
	4	7 X 0.53	12.6	0.6	1.3	17.3	340
	8	7 X 0.53	12.6	0.6	1.3	22.9	570
	12	7 X 0.53	12.6	0.6	1.5	27.2	900
	16	7 X 0.53	12.6	0.6	1.7	30.7	1150
	20	7 X 0.53	12.6	0.6	2	33.8	1400
	24	7 X 0.53	12.6	0.6	2.2	37	1660
	30	7 X 0.53	12.6	0.6	2.2	40.6	2100

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PE Insulation

Single Pair, Collective Screen, Galvanized Steel Wire Armour

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form a pair or triple and screened by aluminium polyester tape with tinned drain wire and wrapped by polyester tapes

Colour code:

Black / White

Bedding:

Polyvinylchloride

Armouring:

Galvanized steel wire armour to BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Pairs	Conductor		Nominal Insulation Thickness	Steel wire diameter	Nominal Sheath thickness	Approximate Overall diameter	Approximate Net Weight
		No. x dia	Max. DC Res.At 20°					
mm2	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
0.5	1	7 x 0.3	39.2	0.6	0.8	1.3	10.3	210
0.75	1	7 x 0.37	24.6	0.6	0.8	1.3	11	230
1	1	7 x 0.43	18.4	0.6	0.8	1.3	11.4	240
1.3	1	7 x 0.49	14.2	0.6	0.8	1.4	11.8	260
1.5	1	7 x 0.53	12.6	0.6	0.8	1.4	12.6	290

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multipairs, Layers, Collective Screen, Galvanized Steel

Wire Armour

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form pairs, pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White, continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Bedding:

Polyvinylchloride

Armouring:

Galvanized steel wire armour BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.At 20° C					
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	0.8	1.4	13.5	330
	4	7 x 0.3	39.2	0.6	0.8	1.4	14.6	370
	8	7 x 0.3	39.2	0.6	1.25	1.5	18.7	630
	12	7 x 0.3	39.2	0.6	1.25	1.6	20.7	770
	16	7 x 0.3	39.2	0.6	1.25	1.6	22.4	880
	20	7 x 0.3	39.2	0.6	1.6	1.7	25.3	1170
	24	7 x 0.3	39.2	0.6	1.6	1.7	27.2	1340



PE Insulation

	30	7 x 0.3	39.2	0.6	1.6	1.9	30.1	1660
0.75	2	7 x 0.37	24.6	0.6	0.8	1.5	15.6	370
	4	7 x 0.37	24.6	0.6	0.8	1.5	16.7	410
	8	7 x 0.37	24.6	0.6	1.25	1.6	21.5	720
	12	7 x 0.37	24.6	0.6	1.25	1.7	24.9	880
	16	7 x 0.37	24.6	0.6	1.6	1.7	27	1200
	20	7 x 0.37	24.6	0.6	1.6	1.8	29.6	1350
	24	7 x 0.37	24.6	0.6	1.6	1.9	32.7	1530
	30	7 x 0.37	24.6	0.6	1.6	2	36.1	1730



Multipairs, Layers, Collective Screen Galvanized Steel Wire Armour

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km
1.0	2	7 x 0.43	18.4	0.6	0.8	1.5	15.2	420
	4	7 x 0.43	18.4	0.6	0.8	1.5	16.4	470
	8	7 x 0.43	18.4	0.6	1.25	1.6	21.1	820
	12	7 x 0.43	18.4	0.6	1.6	1.7	24.4	1170
	16	7 x 0.43	18.4	0.6	1.6	1.7	26.4	1350
	20	7 x 0.43	18.4	0.6	1.6	1.8	28.8	1530
	24	7 x 0.43	18.4	0.6	1.6	1.9	31.8	1760
1.3	2	7 x 0.49	14.2	0.6	0.8	1.5	15.6	430
	4	7 x 0.49	14.2	0.6	1.25	1.5	18.1	600
	8	7 x 0.49	14.2	0.6	1.25	1.6	22.2	860
	12	7 x 0.49	14.2	0.6	1.6	1.7	25.3	1240
	16	7 x 0.49	14.2	0.6	1.6	1.8	28.1	1460
	20	7 x 0.49	14.2	0.6	1.6	1.8	30.4	1600
	24	7 x 0.49	14.2	0.6	1.6	1.9	32.5	1900
1.5	2	7 x 0.53	12.6	0.6	1.25	1.6	18.2	600
	4	7 x 0.53	12.6	0.6	1.25	1.6	19.7	705
	8	7 x 0.53	12.6	0.6	1.6	1.7	25.2	1190
	12	7 x 0.53	12.6	0.6	1.6	1.8	28.1	1460
	16	7 x 0.53	12.6	0.6	1.6	1.9	31.3	1800
	20	7 x 0.53	12.6	0.6	1.6	1.9	34.1	2090
	24	7 x 0.53	12.6	0.6	2.0	2.0	38.3	2680
30	7 x 0.53	12.6	0.6	2.0	2.2	41.6	3220	



PE Insulation

Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour



Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes, where mechanical damages are expected to occur.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form pairs, pairs screened by aluminium polyester tapes, screened pairs twisted in concentric layer and wrapped by polyester tapes

Colour code:

Black / White, continuously numbered, or

identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes.

Bedding:

Polyvinylchloride

Armouring:

Galvanized steel wire armour to BS 1442

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

10x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	steel wire diameter	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km



PE Insulation

0.5	2	7 x 0.3	39.2	0.6	0.8	1.4	14.7	315
	4	7 x 0.3	39.2	0.6	0.8	1.5	15.9	410
	8	7 x 0.3	39.2	0.6	1.25	1.6	20.4	690
	12	7 x 0.3	39.2	0.6	1.25	1.6	22.7	820
	16	7 x 0.3	39.2	0.6	1.6	1.7	25.5	1160
	20	7 x 0.3	39.2	0.6	1.6	1.8	27.8	1320
	24	7 x 0.3	39.2	0.6	1.6	1.9	30.7	1580
	30	7 x 0.3	39.2	0.6	1.6	1.9	33.0	1930
0.75	2	7 x 0.37	24.6	0.6	0.8	1.5	15.6	355
	4	7 x 0.37	24.6	0.6	0.8	1.5	16.7	450
	8	7 x 0.37	24.6	0.6	1.25	1.6	21.5	755
	12	7 x 0.37	24.6	0.6	1.6	1.7	24.9	1110
	16	7 x 0.37	24.6	0.6	1.6	1.7	27.0	1260
	20	7 x 0.37	24.6	0.6	1.6	1.8	29.6	1540
	24	7 x 0.37	24.6	0.6	1.6	1.9	32.7	1760
	30	7 x 0.37	24.6	0.6	2	2.0	36.1	2470



Multipairs, Layers, Individual and Collective Screen, Galvanized Steel Wire Armour

TECHNICAL INFORMATION

Conductor Size	Number of Pairs	Conductor		Nominal Insulation Thickness	Steel wire diameter	Nominal Sheath thickness	Approximate Overall diameter	Approximate Net Weight
		No. x dia	Max. DC Res. At 20°					
mm ²	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
1	2	7 X 0.43	18.4	0.6	1.25	1.5	17.2	500
	4	7 X 0.43	18.4	0.6	1.25	1.5	18.6	610
	8	7 X 0.43	18.4	0.6	1.25	1.7	23.1	920
	12	7 X 0.43	18.4	0.6	1.6	1.7	26.3	1290
	16	7 X 0.43	18.4	0.6	1.6	1.8	28.7	1500
	20	7 X 0.43	18.4	0.6	1.6	1.9	32	1810
	24	7 X 0.43	18.4	0.6	1.6	1.9	34.6	2130
	30	7 X 0.43	18.4	0.6	2	2.1	38.3	2760
1.3	2	7 X 0.49	14.2	0.6	1.25	1.5	18.2	620
	4	7 X 0.49	14.2	0.6	1.25	1.6	20.3	800
	8	7 X 0.49	14.2	0.6	1.6	1.7	26.4	1290
	12	7 X 0.49	14.2	0.6	1.6	1.8	29.5	1480
	16	7 X 0.49	14.2	0.6	1.6	1.9	32	1800
	20	7 X 0.49	14.2	0.6	2	2	36.6	2220
	24	7 X 0.49	14.2	0.6	2	2.1	39.3	3130
	30	7 X 0.49	14.2	0.6	2	2.2	44.2	3810
1.5	2	7 X 0.53	12.6	0.6	1.25	1.7	22.8	930
	4	7 X 0.53	12.6	0.6	1.25	1.7	24.1	1070
	8	7 X 0.53	12.6	0.6	1.6	1.8	30.4	1600
	12	7 X 0.53	12.6	0.6	1.6	1.9	34.1	2030
	16	7 X 0.53	12.6	0.6	1.6	2	38.7	2190
	20	7 X 0.53	12.6	0.6	2	2.2	43.3	3320
	24	7 X 0.53	12.6	0.6	2	2.3	48.5	4310
	30	7 X 0.53	12.6	0.6	2.5	2.5	52.8	5280

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multicores, Layers, Overall Screen of Tinned Copper WireBraid

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black continuously numbered

Screen:

Collective screen of tinned copper wire braid with coverage from 60% up to 80% and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No. x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.1	0.6	1.2	7.2	95
	3	7 x 0.43	18.1	0.6	1.2	7.6	110
	5	7 x 0.43	18.1	0.6	1.3	10.3	150
	7	7 x 0.43	18.1	0.6	1.3	11.1	180
	12	7 x 0.43	18.1	0.6	1.4	14.2	270
	19	7 x 0.43	18.1	0.6	1.4	16.3	380
	24	7 x 0.43	18.1	0.6	1.6	19.2	465
1.5	2	7 x 0.53	12.1	0.6	1.2	9	125
	3	7 x 0.53	12.1	0.6	1.2	9.4	145
	5	7 x 0.53	12.1	0.6	1.3	11.2	200
	7	7 x 0.53	12.1	0.6	1.3	12	240
	12	7 x 0.53	12.1	0.6	1.4	15.4	375
	19	7 x 0.53	12.1	0.6	1.5	18	545
	24	7 x 0.53	12.1	0.6	1.6	21	670

Single Pair, Collective Screen of Tinned Copper Wire Braid

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form a pair wrapped by polyester tapes

Colour code:

Black / White

Screen:

Collective screen of aluminium polyester tapes and tinned copper wire braid with coverage from 60% up to 80% and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Max. DC Res. At 20° C				
mm ²	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1 X 2 X 0.5	7 x 0.3	39.2	0.6	0.8	6.3	40
1 X 2 X 0.75	7 x 0.7	24.6	0.6	0.8	6.6	46
1 X 2 X 1.0	7 x 0.43	18.4	0.6	0.8	7.0	53
1 X 2 X 1.3	7 x 0.49	14.2	0.6	0.9	7.6	65
1 X 2 X 1.5	7 x 0.53	12.6	0.6	0.9	8.2	73



Multipairs, Layers, Overall Screen of Tinned Copper Wire Braid

Application:

These cables are used in the chemical and petrochemical industries for the transmission of analogue and digital signals for measurements and process control purposes.

Engineering Specification:

Standard:

BS 5308-1

Rated Voltage:

300/500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyethelene 03 to BS 6234

Assembly:

Cores twisted to form pairs, twisted pairs in concentric layers and wrapped by polyester tapes

Colour code:

Black / White, continuously numbered, or

identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes and tinned copper wire braid with coverage from 60% up to 80% and wrapped by polyester tapes

Sheath:

Polyvinylchloride TM1 to BS 6746 colour black or blue

Minimum bending radius:

7.5 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1	9.3	95
	4	7 x 0.3	39.2	0.6	1	10	115
	6	7 x 0.3	39.2	0.6	1.2	12.3	175
	8	7 x 0.3	39.2	0.6	1.2	13.2	190
	10	7 x 0.3	39.2	0.6	1.2	14.5	220
	12	7 x 0.3	39.2	0.6	1.2	15	250
0.75	2	7 x 0.37	24.6	0.6	1	10.1	120
	4	7 x 0.37	24.6	0.6	1	10.8	134
	6	7 x 0.37	24.6	0.6	1.2	13.8	220
	8	7 x 0.37	24.6	0.6	1.2	14.3	230
	10	7 x 0.37	24.6	0.6	1.2	15.8	275
	12	7 x 0.37	24.6	0.6	1.2	16.3	320



Multipairs, Layers, Overall Screen of Plain or Tinned Copper Wire Braid

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.0	2	7 x 0.43	18.4	0.6	1.0	10.8	135
	4	7 x 0.43	18.4	0.6	1.0	11.6	160
	6	7 x 0.43	18.4	0.6	1.2	12.8	255
	8	7 x 0.43	18.4	0.6	1.2	15.4	280
	10	7 x 0.43	18.4	0.6	1.3	17.2	345
	12	7 x 0.43	18.4	0.6	1.3	17.8	400
1.3	2	7 x 0.49	14.2	0.6	1.0	11.4	165
	4	7 x 0.49	14.2	0.6	1.2	13.5	195
	6	7 x 0.49	14.2	0.6	1.3	14.7	260
	8	7 x 0.49	14.2	0.6	1.3	16.6	340
	10	7 x 0.49	14.2	0.6	1.3	18.1	410
	12	7 x 0.49	14.2	0.6	1.3	20.2	480
1.5	2	7 x 0.53	12.6	0.6	1.2	12.9	195
	4	7 x 0.53	12.6	0.6	1.2	14.1	230
	6	7 x 0.53	12.6	0.6	1.3	17.8	390
	8	7 x 0.53	12.6	0.6	1.3	18.6	405
	10	7 x 0.53	12.6	0.6	1.3	20.6	490
	12	7 x 0.53	12.6	0.6	1.3	21.3	564

Multicores, Layers, Collective Screen, Strande

Application:

These cables are used in fire fighting alarm systems in hazardous area where the safety is highly required during fire condition.

Engineering Specification:

Standard:

IEC 60502

Rated Voltage:

600 / 1000 V

Conductor:

Stranded plain / tinned annealed copper

Insulation:

Flame barrier mica tape, cross-linked polyethylene

Assembly:

Cores twisted together in concentric layers and wrapped by polyester tapes

Colour code:

Black continuously numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Halogen free, low smoke thermoplastic material, red colour

Minimum bending radius:

7.5 x d (d= overall diameter)

Fire resistant property:

750°C according to IEC 331



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.5	2	7 x 0.52	12.1	0.7	1.8	10.5	115
	5	7 x 0.52	12.1	0.7	1.8	12.8	204
	7	7 x 0.52	12.1	0.7	1.8	13.8	212
	10	7 x 0.52	12.1	0.7	1.8	17.2	352
	12	7 x 0.52	12.1	0.7	1.8	17.8	402
	19	7 x 0.52	12.1	0.7	1.8	20.6	582
	24	7 x 0.52	12.1	0.7	1.8	23.9	720
	30	7 x 0.52	12.1	0.7	1.8	25.3	870



PE Insulation

	37	7 x 0.52	12.1	0.7	1.8	27.3	1040
2.5	2	7 x 0.67	7.41	0.7	1.8	11.4	146
	5	7 x 0.67	7.41	0.7	1.8	14.1	260
	7	7 x 0.67	7.41	0.7	1.8	15.2	325
	10	7 x 0.67	7.41	0.7	1.8	19.0	435
	12	7 x 0.67	7.41	0.7	1.8	19.6	500
	19	7 x 0.67	7.41	0.7	1.8	22.8	700
	24	7 x 0.67	7.41	0.7	1.8	26.6	860
	30	7 x 0.67	7.41	0.7	1.9	28.4	1040
	37	7 x 0.67	7.41	0.7	1.9	30.1	1250



Multipairs, Layers, Collective Screen, Stranded Conductor

Application:

These cables are used in fire fighting alarm systems in hazardous area where the safety is highly required during fire condition.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Stranded plain / tinned annealed copper

Insulation:

Flame barrier mica tape, cross-linked polyethylene

Assembly:

Cores twisted to form pairs, pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes.

Sheath:

Halogen free, low smoke thermoplastic material, red colour

Minimum bending radius:

6 x d (d= overall diameter)

Fire resistant property:

750°C according to IEC 331

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.5	2	7 x 0.3	39.2	0.6	1.2	11.1	98
	4	7 x 0.3	39.2	0.6	1.2	12.8	145
	6	7 x 0.3	39.2	0.6	1.2	15.3	200
	8	7 x 0.3	39.2	0.6	1.3	17.0	270
	10	7 x 0.3	39.2	0.6	1.3	18.8	310
	12	7 x 0.3	39.2	0.6	1.4	19.9	355
	16	7 x 0.3	39.2	0.6	1.4	22.5	454
	20	7 x 0.3	39.2	0.6	1.5	25.0	560
	24	7 x 0.3	39.2	0.6	1.5	27.1	650
	30	7 x 0.3	39.2	0.6	1.6	30.1	800



Fire Resistant Cables

0.75	2	7 x 0.37	24.6	0.6	1.2	11.8	110
	4	7 x 0.37	24.6	0.6	1.2	13.7	175
	6	7 x 0.37	24.6	0.6	1.3	16.6	245
	8	7 x 0.37	24.6	0.6	1.3	17.7	305
	10	7 x 0.37	24.6	0.6	1.3	20.1	370
	12	7 x 0.37	24.6	0.6	1.4	21.3	435
	16	7 x 0.37	24.6	0.6	1.4	24.1	555
	20	7 x 0.37	24.6	0.6	1.5	26.8	685
	24	7 x 0.37	24.6	0.6	1.5	29.1	800
	30	7 x 0.37	24.6	0.6	1.6	32.3	990

Multipairs, Layers, Collective Screen, Stranded Conductor

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.At 20° C				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	13.1	142
	4	7 x 0.43	18.4	0.6	1.3	15.5	230
	6	7 x 0.43	18.4	0.6	1.3	18.6	325
	8	7 x 0.43	18.4	0.6	1.3	19.8	405
	10	7 x 0.43	18.4	0.6	1.3	22.6	490
	12	7 x 0.43	18.4	0.6	1.4	23.9	585
	16	7 x 0.43	18.4	0.6	1.5	27.4	760
	20	7 x 0.43	18.4	0.6	1.6	30.4	940
	24	7 x 0.43	18.4	0.6	1.6	33	1100
1.5	30	7 x 0.43	18.4	0.6	1.7	36.7	1360
	2	7 x 0.53	12.6	0.6	1.2	14	166
	4	7 x 0.53	12.6	0.6	1.3	16.7	286
	6	7 x 0.53	12.6	0.6	1.3	20.1	400
	8	7 x 0.53	12.6	0.6	1.3	21.5	505
	10	7 x 0.53	12.6	0.6	1.3	24.5	620
	12	7 x 0.53	12.6	0.6	1.4	26	735
	16	7 x 0.53	12.6	0.6	1.5	29.7	960
	20	7 x 0.53	12.6	0.6	1.6	33	1185
	24	7 x 0.53	12.6	0.6	1.7	36.1	1410
30	7 x 0.53	12.6	0.6	1.7	40	1725	

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.
- We can meet all other standard as BS 5308 and IEC 502.



Fire Resistant Cables

Multipairs, Layers, Individual and Collective Screen, Stranded Conductor

Application:

These cables are used in fire fighting alarm systems in hazardous area where the safety is highly required during fire condition.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Stranded plain / tinned annealed copper

Insulation:

Flame barrier mica tape, cross-linked polyethylene

Assembly:

Cores twisted to form pairs, pairs screened by aluminium polyester tapes, screened pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Black / White continuously numbered, or Identification tapes numbered

Screen:

Collective screen of aluminum polyester tapes with tinned drain wire and wrapped by polyester tapes

Sheath:

Halogen free, low smoke thermoplastic material, red colour

Minimum bending radius:

6 x d (d= overall diameter)

Fire resistant property:

750°C according to IEC 331

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km



Fire Resistant Cables

0.5	2	7 x 0.3	39.2	0.6	1.2	11.8	110
	4	7 x 0.3	39.2	0.6	1.2	13.7	170
	6	7 x 0.3	39.2	0.6	1.2	16.4	234
	8	7 x 0.3	39.2	0.6	1.3	17.7	296
	10	7 x 0.3	39.2	0.6	1.3	20.1	360
	12	7 x 0.3	39.2	0.6	1.4	21.3	425
	16	7 x 0.3	39.2	0.6	1.4	24.1	540
	20	7 x 0.3	39.2	0.6	1.5	26.8	670
	24	7 x 0.3	39.2	0.6	1.5	29.1	780
	30	7 x 0.3	39.2	0.6	1.6	32.3	960
0.75	2	7 x 0.37	24.6	0.6	1.2	12.5	126
	4	7 x 0.37	24.6	0.6	1.2	14.5	200
	6	7 x 0.37	24.6	0.6	1.3	17.7	285
	8	7 x 0.37	24.6	0.6	1.3	18.8	350
	10	7 x 0.37	24.6	0.6	1.3	21.5	430
	12	7 x 0.37	24.6	0.6	1.4	22.7	505
	16	7 x 0.37	24.6	0.6	1.4	25.8	650
	20	7 x 0.37	24.6	0.6	1.5	28.7	800
	24	7 x 0.37	24.6	0.6	1.5	31.1	935
	30	7 x 0.37	24.6	0.6	1.6	34.6	1155

Multipairs, Layers, Individual and Collective Screen, Stranded Conductor

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1	2	7 x 0.43	18.4	0.6	1.2	13.1	142
	4	7 x 0.43	18.4	0.6	1.3	15.5	230
	6	7 x 0.43	18.4	0.6	1.3	18.6	325
	8	7 x 0.43	18.4	0.6	1.3	19.8	405
	10	7 x 0.43	18.4	0.6	1.3	22.6	490
	12	7 x 0.43	18.4	0.6	1.4	23.9	585
	16	7 x 0.43	18.4	0.6	1.5	27.4	760
	20	7 x 0.43	18.4	0.6	1.6	30.4	940
	24	7 x 0.43	18.4	0.6	1.6	33.0	1100
	30	7 x 0.43	18.4	0.6	1.7	36.7	1360
1.5	2	7 x 0.53	12.6	0.6	1.2	14.0	166
	4	7 x 0.53	12.6	0.6	1.3	16.7	286
	6	7 x 0.53	12.6	0.6	1.3	20.1	400
	8	7 x 0.53	12.6	0.6	1.3	21.5	505
	10	7 x 0.53	12.6	0.6	1.3	24.5	620
	12	7 x 0.53	12.6	0.6	1.4	26.0	735
	16	7 x 0.53	12.6	0.6	1.5	29.7	960
	20	7 x 0.53	12.6	0.6	1.6	33.0	1185
	24	7 x 0.53	12.6	0.6	1.7	36.1	1410
	30	7 x 0.53	12.6	0.6	1.7	40.0	1725



Multicores, Unscreened, Stranded Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Stranded annealed plain copper

Insulation:

polyvinylchloride rated for 105oC

Assembly:

Cores twisted together in concentric layers

Colour code:

Two Core: red, black

Three Core: red, black, blue

Four Core: red, yellow, blue, black

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.0	2	7 x 0.43	18.1	0.6	0.8	6.6	65
	3	7 x 0.43	18.1	0.6	0.8	7.0	79
	4	7 x 0.43	18.1	0.6	0.8	7.6	98
	2	7 x 0.52	12.1	0.6	0.8	7.1	81
	3	7 x 0.52	12.1	0.6	0.9	7.8	103
	4	7 x 0.52	12.1	0.6	0.9	8.5	128



Multipairs, Layers, Collective Screen, Stranded Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Stranded annealed plain copper

Insulation:

Polyvinylchloride rated for 105oC

Assembly:

Cores twisted to form pairs, pairs twisted in concentric layers and wrapped by polyester tapes.

Colour code:

Red / Black continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminium polyester tap with tinned drainwire and wrapped by polyester tapes

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.				
			At 20° C				
mm2	No.	No. xmm	Ohm /Km	mm	mm	mm	Kg/Km
1.5	2	7 x 0.53	12.6	0.6	1.2	12	155
	4	7 x 0.53	12.6	0.6	1.2	14	253
	8	7 x 0.53	12.6	0.6	1.3	18.1	457
	12	7 x 0.53	12.6	0.6	1.3	21.6	652
	16	7 x 0.53	12.6	0.6	1.5	24.7	860
	20	7 x 0.53	12.6	0.6	1.5	27.5	1058
	24	7 x 0.53	12.6	0.6	1.7	30.2	1270
	30	7 x 0.53	12.6	0.6	2	33.9	1600

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multicores, Unscreened, Solid Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Solid annealed plain copper

Insulation:

polyvinylchloride rated for 105oC

Assembly:

Cores twisted together in concentric layers

Colour code:

Two Core: red, black

Three Core: red, black, blue

Four Core: red, yellow, blue, black

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Cores	Conductor		Nominal Insulation thickness	Nominal Theath Thickness	Approximate overall Diameter	Approximate net Weight
		No.x Dia	Max.dc Resis. At 20C				
mm ²	No.	No.x mm	Ohm/ Km	mm	mm	mm	kg/km
1	2	1x1.13	18.1	0.6	0.8	6.3	49
	3	1x1.13	18.1	0.6	0.8	6.6	65
	4	1x1.13	18.1	0.6	0.8	7.2	81
1.5	2	1x1.35	12.1	0.6	0.8	6.7	60
	3	1x1.35	12.1	0.6	0.9	7.3	84
	4	1x1.35	12.1	0.6	0.9	8	105

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multipairs, Layers, Collective Screen, Solid Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Solid annealed plain copper

Insulation:

Polyvinylchloride rated for 105oC

Assembly:

Cores twisted to form pairs, pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Red / Black continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminium polyester tap with tinned drain wire and wrapped by polyester tapes

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Pairs	Conductor		Nominal Insulation thickness	Nominal Theath Thickness	Approximate overall Diameter	Approximate net Weight
		No. x Dia	Max.dc Resis. At 20C				
mm2	No.	No. x mm	Ohm/Km	mm	mm	mm	kg/km
1.5	2	1x1.35	12.1	0.6	1.2	11.3	142
	4	1x1.35	12.1	0.6	1.2	13.1	232
	8	1x1.35	12.1	0.6	1.3	16.9	418
	12	1x1.35	12.1	0.6	1.3	20.1	596
	16	1x1.35	12.1	0.6	1.5	23.3	293
	20	1x1.35	12.1	0.6	1.5	25.6	967
	24	1x1.35	12.1	0.6	1.5	27.8	1139
	30	1x1.35	12.1	0.6	1.7	31.1	1426

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multicores, Unscreened, Flexible Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Flexible annealed plain copper

Insulation:

Polyvinylchloride rated for 105oC

Assembly:

Cores twisted together in concentric layers

Colour code:

Two Core: red, black

Three Core: red, black, blue

Four Core: red, yellow, blue, black

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Cores	Conductor		Nominal Insulation thickness	Nominal Theath Thickness	Approximate overall Diameter	Approximate net Weight
		No.x Dia	Max.dc Resis. At 20C				
mm2	No.	No.x mm	Ohm/Km	mm	mm	mm	kg/km
1	2	32x0.19	19.5	0.6	0.8	6.5	49
	3	32x0.19	19.5	0.6	0.8	6.9	75
	4	32x0.19	19.5	0.6	0.8	7.5	92
1.5	2	36x0.22	13.3	0.6	0.8	7.1	78
	3	36x0.22	13.3	0.6	0.9	7.7	99
	4	36x0.22	13.3	0.6	0.9	8.4	122

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Multipairs, Layers, Collective Screen, Flexible Conductor

Application:

These cables are used for communication and signaling in fire alarm systems.

Engineering Specification:

Standard:

BS-5308

Rated Voltage:

300 / 500 V

Conductor:

Flexible annealed plain copper

Insulation:

Polyvinylchloride rated for 105oC

Assembly:

Cores twisted to form pairs, pairs twisted in concentric layers and wrapped by polyester tapes

Colour code:

Red/Black continuously numbered, or identification tapes numbered

Screen:

Collective screen of aluminium polyester tap with tinned drain wire and wrapped by polyester tapes

Sheath:

Flame retardant polyvinylchloride, red coloured

Minimum bending radius:

7.5 x d (d= overall diameter)

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor Size	Number of Pairs	Conductor		Nominal Insulation thickness	Nominal Theath Thickness	Approximate overall Diameter	Approximate net Weight
		No.x Dia	Max.dc Resis. At 20C				
mm2	No.	No.x mm	Ohm/Km	mm	mm	mm	kg/km
1.5	2	36x0.22	13.3	0.6	1.2	11.8	143
	4	36x0.22	13.3	0.6	1.2	13.7	229
	8	36x0.22	13.3	0.6	1.3	17.8	412
	12	36x0.22	13.3	0.6	1.5	21.6	585
	16	36x0.22	13.3	0.6	1.5	24.4	777
	20	36x0.22	13.3	0.6	1.5	26.9	947
	24	36x0.22	13.3	0.6	1.7	29.6	1143
	30	36x0.22	13.3	0.6	1.7	32.7	1395

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Stranded Copper Conductors

PVC Insulation, PVC Sheathed

Application:

For outdoor and indoor installations in damp and wet locations, connecting signaling and control units in industry, in railways, in traffic signals, in thermopower and hydropower stations. They are laid in air, in ducts, in trenches, in steel support brackets or direct in ground, when well protected.

Engineering Specification:

Standard:

IEC – 60502

Rated Voltage:

300 / 500 V

Conductor:

Soft annealed solid copper wire as per class

1 of IEC 228

Insulation:

Polyvinylchloride rated 70oC or 85oC

Assembly:

Cores twisted together to form a round

assembly cable with fillers whenever

necessary

Colour code:

Black cores with white numbers and one green yellow core

Sheath:

Flame retardant polyvinylchloride, black or grey colour

Minimum bending radius:

15 x d (d= overall diameter)

Temperature rating:

+5oC up to + 50oC during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.No. x	Max. DC Res. At 20oC				
mm ²	No.	mm	Ohm /Km	mm	mm	mm	Kg/Km
1.5	5	1x1.38	12.1	0.8	1.8	11.8	200
	7	1x1.38	12.1	0.8	1.8	12.7	250
	10	1x1.38	12.1	0.8	1.8	15.7	340
	12	1x1.38	12.1	0.8	1.8	16.2	385
	14	1x1.38	12.1	0.8	1.8	17	435
	16	1x1.38	12.1	0.8	1.8	17.8	490
	19	1x1.38	12.1	0.8	1.8	18.7	560
	24	1x1.38	12.1	0.8	1.8	21.7	700
	30	1x1.38	12.1	0.8	1.8	23.8	850
	37	1x1.38	12.1	0.8	1.8	24.7	1000
	44	1x1.38	12.1	0.8	1.8	28.4	1200



PVC Insulation, PVC Sheathed

TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
2.5	5	1x1.78	7.41	0.8	1.8	12.9	260
	7	1x1.78	7.41	0.8	1.8	13.8	330
	10	1x1.78	7.41	0.8	1.8	17.2	450
	12	1x1.78	7.41	0.8	1.8	17.7	540
	14	1x1.78	7.41	0.8	1.8	18.6	600
	16	1x1.78	7.41	0.8	1.8	19.6	670
	19	1x1.78	7.41	0.8	1.8	20.6	780
	24	1x1.78	7.41	0.8	1.8	24	1030
	30	1x1.78	7.41	0.8	1.8	25.4	1160
	37	1x1.78	7.41	0.8	1.9	27.4	1410
4	44	1x1.78	7.41	0.8	2	31.2	1670
	5	1x2.26	4.61	1	1.8	15.3	430
	7	1x2.26	4.61	1	1.8	16.5	480
	10	1x2.26	4.61	1	1.8	20.8	670
	12	1x2.26	4.61	1	1.8	21.5	780
	14	1x2.26	4.61	1	1.8	22.6	890
	16	1x2.26	4.61	1	1.8	23.8	1000
	19	1x2.26	4.61	1	1.9	25.1	1170
	24	1x2.26	4.61	1	2	29.6	1460
	30	1x2.26	4.61	1	2.1	31.6	1830
	37	1x2.26	4.61	1	2.2	34.1	2320

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Stranded Copper Conductors

PVC Insulation, Copper Tape Screened, PVC Sheathed

Application:

For outdoor installations in damp and wet locations, connecting signaling and control units in industry in railways, in traffic signals, in thermopower and hydropower stations. Where electrical interference could alter signal transmission, They are laid in air, in ducts, in trenches, in steel support brackets or direct in ground, when well protected.

Engineering Specification:

Standard:

IEC – 60502

Rated Voltage:

600 / 1000 V

Conductor:

Soft annealed stranded copper wire as per class 2 of IEC 228

Insulation:

Polyvinylchloride rated 70oC or 85oC

Assembly:

Cores twisted together to form a round assembly cable with fillers whenever necessary

Colour code:

Black cores with white numbers and one

green yellow core

Bedding:

Polyvinylchloride rated 70oC

Screen :

Copper tape helically applied over the bedding

Sheath:

Flame retardant polyvinylchloride, black or grey colour

Minimum bending radius:

15 x d (d= overall diameter)

Temperature rating:

+5oC up to + 50oC during operation

Packing:

On non-returnable wooden drum



TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.At 20oC				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.5	5	7x 0.52	12.1	0.8	1.8	12.3	215
	7	7x 0.52	12.1	0.8	1.8	13.3	265
	10	7x 0.52	12.1	0.8	1.8	16.5	360
	12	7x 0.52	12.1	0.8	1.8	17	410
	14	7x 0.52	12.1	0.8	1.8	17.8	465
	16	7x 0.52	12.1	0.8	1.8	18.7	530
	19	7x 0.52	12.1	0.8	1.8	19.7	600
	24	7x 0.52	12.1	0.8	1.8	22.9	740
	30	7x 0.52	12.1	0.8	1.8	24.2	890
	37	7x 0.52	12.1	0.8	1.8	26.1	1070
	44	7x 0.52	12.1	0.8	1.8	30.2	1295



PVC Insulation, Copper Tape Screened, PVC Sheathed

TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.At 20oC				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
2.5	5	7x0.67	7.41	0.8	1.8	13.4	275
	7	7x0.67	7.41	0.8	1.8	14.5	350
	10	7x0.67	7.41	0.8	1.8	18.1	480
	12	7x0.67	7.41	0.8	1.8	18.7	555
	14	7x0.67	7.41	0.8	1.8	19.6	630
	16	7x0.67	7.41	0.8	1.8	20.6	710
	19	7x0.67	7.41	0.8	1.8	21.7	820
	24	7x0.67	7.41	0.8	1.8	25.3	1020
	30	7x0.67	7.41	0.8	1.8	26.8	1235
	37	7x0.67	7.41	0.8	1.9	28.9	1495
4	44	7x0.67	7.41	0.8	2	33.5	1800
	5	7x0.85	4.61	1	1.8	16.1	440
	7	7x0.85	4.61	1	1.8	17.4	520
	10	7x0.85	4.61	1	1.8	22	720
	12	7x0.85	4.61	1	1.8	22.7	840
	14	7x0.85	4.61	1	1.8	23.9	950
	16	7x0.85	4.61	1	1.8	25.2	1070
	19	7x0.85	4.61	1	1.9	26.6	1260
	24	7x0.85	4.61	1	2	31.4	1580
	30	7x0.85	4.61	1	2.1	33.5	1965
37	7x0.85	4.61	1	2.2	36.2	2510	

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation, Steel Tape Armoured, PVC Sheathed

Application:

For outdoor and indoor installations in damp and wet locations, Laid Direct in the ground, where mechanical damages are expected to occur. They are normally used in connecting signaling and control units in industry, in railways, in traffic signals, in thermopower and hydropower stations.

Engineering Specification:

Standard:

IEC – 60502

Rated Voltage:

600 / 1000 V

Conductor:

Soft annealed Stranded Copper wire as per class 2 of IEC 228

Insulation:

Polyvinylchloride rated 70oC or 85oC

Assembly:

Cores twisted together to form a round assembly cable with fillers whenever necessary

Colour code:

Black cores with white numbers and one

green yellow core

Bedding:

Polyvinylchloride rated 70°C

Armouring:

Double layers of steel tapes are applied helically

Sheath:

Flame retardant polyvinylchloride, black or grey colour

Minimum bending radius:

15 x d (d= overall diameter)

Temperature rating:

+5°C up to + 50°C during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res.At 20° C				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
1.5	5	7x 0.52	12.1	0.8	1.8	15.3	340
	7	7x 0.52	12.1	0.8	1.8	15.7	370
	10	7x 0.52	12.1	0.8	1.8	18.9	495
	12	7x 0.52	12.1	0.8	1.8	19.4	550
	14	7x 0.52	12.1	0.8	1.8	20.2	610
	16	7x 0.52	12.1	0.8	1.8	21.1	670
	19	7x 0.52	12.1	0.8	1.8	22.1	760
	24	7x 0.52	12.1	0.8	1.8	25.3	930
	30	7x 0.52	12.1	0.8	1.8	27.5	1115
	37	7x 0.52	12.1	0.8	1.9	28.5	1290
	44	7x 0.52	12.1	0.8	2	31	1500



PVC Insulation, Steel Tape Armoured, PVC Sheathed

TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20oC				
mm2	No.	No. xmm	Ohm /Km	mm	mm	mm	Kg/Km
2.5	5	7x0.67	7.41	0.8	1.8	15.8	390
	7	7x0.67	7.41	0.8	1.8	16.9	470
	10	7x0.67	7.41	0.8	1.8	20.5	630
	12	7x0.67	7.41	0.8	1.8	21.1	710
	14	7x0.67	7.41	0.8	1.8	22	800
	16	7x0.67	7.41	0.8	1.8	23	875
	19	7x0.67	7.41	0.8	1.8	24.1	1000
	24	7x0.67	7.41	0.8	1.8	27.7	1225
	30	7x0.67	7.41	0.8	1.9	29.8	1470
	37	7x0.67	7.41	0.8	2	31.5	1750
4	5	7x0.85	4.61	1	1.8	18.5	540
	7	7x0.85	4.61	1	1.8	19.5	670
	10	7x0.85	4.61	1	1.8	24.4	850
	12	7x0.85	4.61	1	1.8	25.2	980
	14	7x0.85	4.61	1	1.8	26.3	1160
	16	7x0.85	4.61	1	1.9	27.6	1310
	19	7x0.85	4.61	1	2	29	1520
	24	7x0.85	4.61	1	2.1	33.8	1900
	30	7x0.85	4.61	1	2.3	35.9	2350
	37	7x0.85	4.61	1	2.4	38.8	2970

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



PVC Insulation, Steel Wire Armoured, PVC Sheathed

Application:

For outdoor and indoor installations in damp and wet locations, laid direct in the ground, where mechanical damages are expected to occur. They are normally used in connecting signaling and control units in industry, in railways, in traffic signals, in thermopower and hydropower stations.

Engineering Specification:

Standard:

IEC – 60502

Rated Voltage:

600 / 1000 V

Conductor:

Soft annealed stranded copper wire as per class 2 of IEC 228

Insulation:

Polyvinylchloride rated 70oC or 85oC

Assembly:

Cores twisted together to form a round assembly cable with fillers whenever necessary

Colour code:

Black cores with white numbers and one

green yellow core

Bedding:

Polyvinylchloride rated 70oC

Armouring:

Single layers of steel wire are applied helically

Sheath:

Flame retardant polyvinylchloride, black or grey colour

Minimum bending radius:

15 x d (d= overall diameter)

Temperature rating:

+5oC up to + 50oC during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal Thickness of Steel tape	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20°C					
mm ²	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
1.5	5	7x 0.52	12.1	0.8	0.2	1.8	14.6	350
	7	7x 0.52	12.1	0.8	0.2	1.8	17	430
	10	7x 0.52	12.1	0.8	0.2	1.8	19.3	570
	12	7x 0.52	12.1	0.8	0.2	1.8	19.8	625
	14	7x 0.52	12.1	0.8	0.2	1.8	20.6	690
	16	7x 0.52	12.1	0.8	0.2	1.8	21.5	800
	19	7x 0.52	12.1	0.8	0.2	1.8	22.5	850
	24	7x 0.52	12.1	0.8	0.2	1.8	25.7	1030
	30	7x 0.52	12.1	0.8	0.2	1.8	27.3	1285
	37	7x 0.52	12.1	0.8	0.2	1.8	28.9	1400
	44	7x 0.52	12.1	0.8	0.2	1.9	31	1800



PVC Insulation, Steel Wire Armoured, PVC Sheathed

TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal Thickness of Steel tape	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20oC					
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	mm	Kg/Km
2.5	5	7x 0.67	7.41	0.8	0.2	1.8	16.2	440
	7	7x 0.67	7.41	0.8	0.2	1.8	17.3	530
	10	7x 0.67	7.41	0.8	0.2	1.8	20.9	710
	12	7x 0.67	7.41	0.8	0.2	1.8	21.5	790
	14	7x 0.67	7.41	0.8	0.2	1.8	22.4	880
	16	7x 0.67	7.41	0.8	0.2	1.8	23.4	970
	19	7x 0.67	7.41	0.8	0.2	1.8	24.5	1090
	24	7x 0.67	7.41	0.8	0.2	1.8	28.1	1140
	30	7x 0.67	7.41	0.8	0.2	1.9	27.3	1630
	37	7x 0.67	7.41	0.8	0.2	1.9	31.9	1875
4	5	7x 0.85	4.61	0.8	0.2	1.8	18.9	660
	7	7x 0.85	4.61	0.8	0.2	1.8	20.3	740
	10	7x 0.85	4.61	0.8	0.2	1.8	24.9	960
	12	7x 0.85	4.61	0.8	0.2	1.8	25.6	1120
	14	7x 0.85	4.61	0.8	0.2	1.8	26.7	1270
	16	7x 0.85	4.61	0.8	0.2	1.8	28	1390
	19	7x 0.85	4.61	0.8	0.2	1.8	29.4	1610
	24	7x 0.85	4.61	0.8	0.2	2	34.4	2030
	30	7x 0.85	4.61	0.8	0.2	2.1	36.5	2660
	37	7x 0.85	4.61	0.8	0.5	2.2	39.4	3250

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Stranded Copper Conductors

PVC Insulation, Steel Wire Armoured, PVC Sheathed

Application:

For outdoor and indoor installations in damp and wet locations, laid direct in the ground, where mechanical damages are expected to occur. They are normally used in connecting signaling and control units in industry, in railways, in traffic signals, in thermopower and hydropower stations.

Engineering Specification:

Standard:

IEC – 60502

Rated Voltage:

600 / 1000 V

Conductor:

Soft annealed stranded copper wire as per class 2 of IEC 228

Insulation:

Polyvinylchloride rated 70oC or 85oC

Assembly:

Cores twisted together to form a round assembly cable with fillers whenever necessary

Colour code:

Black cores with white numbers and one

green yellow core

Bedding:

Polyvinylchloride rated 70oC

Armouring:

Single layers of steel wire are applied helically

Sheath:

Flame retardant polyvinylchloride, black or grey colour

Minimum bending radius:

15 x d (d= overall diameter)

Temperature rating:

+5oC up to + 50oC during operation

Packing:

On non-returnable wooden drums



TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal Diameter of steel wire	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm2	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
1.5	5	7x 0.52	12.1	0.8	0.8	1.8	16.6	500
	7	7x 0.52	12.1	0.8	0.8	1.8	18	550
	10	7x 0.52	12.1	0.8	0.8	1.8	21	770
	12	7x 0.52	12.1	0.8	1.6	1.8	23.3	1080
	14	7x 0.52	12.1	0.8	1.6	1.8	24.2	1140
	16	7x 0.52	12.1	0.8	1.6	1.8	25	1260
	19	7x 0.52	12.1	0.8	1.6	1.8	26	1370
	24	7x 0.52	12.1	0.8	1.6	1.8	28.9	1620
	30	7x 0.52	12.1	0.8	1.6	1.8	31	1850
	37	7x 0.52	12.1	0.8	1.6	1.9	34	2250
	44	7x 0.52	12.1	0.8	2	2	37.3	2560



PVC Insulation, Steel Wire Armoured, PVC Sheathed

TECHNICAL INFORMATION

Conductor size	Number of Cores	Conductor		Nominal insulation thickness	Nominal Diameter of steel wire	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20° C					
mm ²	No.	No. x mm	Ohm/Km	mm	mm	mm	mm	Kg/Km
2.5	5	7x 0.67	7.41	0.8	0.8	1.8	17.8	600
	7	7x 0.67	7.41	0.8	0.8	1.8	19.2	660
	10	7x 0.67	7.41	0.8	1.6	1.8	23.8	1160
	12	7x 0.67	7.41	0.8	1.6	1.8	25	1280
	14	7x 0.67	7.41	0.8	1.6	1.8	26	1390
	16	7x 0.67	7.41	0.8	1.6	1.8	27	1510
	19	7x 0.67	7.41	0.8	1.6	1.9	28.3	1670
	24	7x 0.67	7.41	0.8	1.6	1.9	31.4	2030
	30	7x 0.67	7.41	0.8	1.6	1.9	34.5	2450
	37	7x 0.67	7.41	0.8	1.6	2	37.4	2870
	44	7x 0.67	7.41	0.8	2	2.1	40.5	3280
4	5	7x 0.85	4.61	1	1.6	1.8	20.8	780
	7	7x 0.85	4.61	1	1.6	1.8	23.5	1190
	10	7x 0.85	4.61	1	1.6	1.8	27.2	1510
	12	7x 0.85	4.61	1	1.6	1.8	29	1700
	14	7x 0.85	4.61	1	1.6	1.8	30	1850
	16	7x 0.85	4.61	1	1.6	1.9	31.6	2040
	19	7x 0.85	4.61	1	1.6	1.9	33	2260
	24	7x 0.85	4.61	1	2	2.1	38.4	3070
	30	7x 0.85	4.61	1	2	2.1	41.3	3560
	37	7x 0.85	4.61	1	2	2.2	43.2	4120

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.



Data Cable - Category 5e

Application:

The cable is used for Local Area Computer Networks mainly in office or business environments.

Engineering Specification:

Type:

UTP- Cat 5e

Standard:

TIA / EIA 568 A, ISO / IEC 11801

Conductor:

24 AWG (0.528mm) solid bare conductor

Insulation:

Solid polyethylene, diameter 0.95mm

Pairs:

2 insulated conductors twisted together, Lay varied to minimize crosstalk

Assembly:

4 pairs twisted together

Sheath:

Flame retardant PVC Grey RAL 7032, 5.86mm nominal diameter

Pair Colours:

One Pair : blue & white / blue

Two Pairs : orange & white / orange

Three Pairs : green & white / green

Four Pairs : brown & white / brown

Bending radius:

8 x O.D during installation

Temperature range during operation:

+5°C up to + 50°C



ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Characteristic impedance (ohms)	Maximum Attenuation (dB /100m @ 20oC)	Near End Cross talk Minimum	Minimum Structural Return Loss (dB) at 100mm
1	100 ± 15%	2.1	65	23
4	100 ± 15%	4.1	56	23
10	100 ± 15%	6.5	50	23
16	100 ± 15%	8.3	47	23
20	100 ± 15%	9.3	46	23
31.25	100 ± 15%	11.7	43	21
62.5	100 ± 15%	17	38	18
100	100 ± 15%	22	36	16
125	100 ± 15%	25	34	16

Pakaging

Available in easy – pull boxes of 1000 feet (305m) capacity.

This assures the cable will not be damaged during installation due to the “figure 8” internal coiling.

It also enables easy, tidy storage before and during installation.

Data Cable - Category 5e

Application:

The cable is used for Local Area Computer Networks mainly in electrically noisy office or industrial environments.

Engineering Specification:

Type:

STP- Cat 5e

Standard:

TIA/ EIA 568 A, ISO / IEC 11801

Conductor:

24 AWG (0.528mm) solid bare conductor

Insulation:

Solid polyethylene, diameter 1.09mm

Pairs:

2 insulated conductors twisted together, lay varied to minimize crosstalk

Assembly:

4 pairs twisted together

Screen:

Aluminium polyester tape and 0.5mm plain or tinned copper drain wire

Pair Colours:

One Pair : blue & white / blue

Two Pairs : orange & white / orange

Three Pairs : green & white / green

Four Pairs : brown & white / brown

Bending radius:

8 x O.D during installation

Temperature range during operation:

+5°C up to + 50



ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Characteristic impedance (ohms)	Maximum Attenuation (dB /100m @ 20°C)	Near End Cross talk Minimum	Minimum Structural Return Loss (dB) at 100mm
0.772	-	1.8	64	-
1	100 ± 15%	2	62	23
4	100 ± 15%	4.1	53	23
10	100 ± 15%	6.5	47	23
16	100 ± 15%	8.2	44	23
20	100 ± 15%	9.2	42	23
31.25	100 ± 15%	11.7	39	21
62.5	100 ± 15%	17	35	18
100	100 ± 15%	22	32	16
125	100 ± 15%	25	32	16

Packaging

Available in easy – pull boxes of 1000 feet (305m) capacity.

This assures the cable will not be damaged during installation due to

the “figure 8” internal coiling. It also enables easy, tidy storage before and during installation.

Data Cable - Category 6

Application:

The cable is used for Local Area Computer Networks where performance greater than that available from category 5 specification is required.

Engineering Specification:

Type:

UTP- Cat 6

Standard:

TIA/ EIA 568 A, ISO / IEC 11801

Conductor:

24 AWG (0.54mm) solid bare conductor

Insulation:

Solid polyethylene, diameter 0.97mm

Pairs:

2 insulated conductors twisted together, Lay varied to minimize crosstalk

Assembly:

4 pairs twisted together

Sheath:

Flame retardant PVC Grey RAL 7032, 5.94mm nominal diameter

Pair Colours:

One Pair : blue & white / blue

Two Pairs : orange & white / orange

Three Pairs : green & white / green

Four Pairs : brown & white / brown

Bending radius:

8 x O.D during installation

Temperature range during operation:

+5°C up to + 50°C



ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Characteristic impedance (ohms)	Maximum Attenuation (dB /100m @ 20°C)	Near End Cross talk Minimum	Minimum Structural Return Loss (dB) at 100mm
1	100 ± 15%	1.9	80	78
4	100 ± 15%	3.8	74	70.3
10	100 ± 15%	6	68	62.2
16	100 ± 15%	7.6	64	56.6
20	100 ± 15%	8.6	62.2	53.8
31.25	100 ± 15%	10.9	59	48.6
62.5	100 ± 15%	15.8	54	39.2
100	100 ± 15%	20.5	50	31.2
125	100 ± 15%	20.9	48	27.1
200	100 ± 15%	27	42	15

Packaging

Available in easy – pull boxes of 1000 feet (305m) capacity.

This assures the cable will not be damaged during installation due to the “figure 8” internal coiling.

It also enables easy, tidy storage before and during installation.



Telephone Cable

PVC Insulated Multipairs

Application:

The cable is used for Indoor installation and interconnection of Transmission, Telephone, Telegraph and Electronic equipment.

Engineering Specification:

Standard:

IEC-189 & TC-113

Conductor:

Solid, plain / tinned copper.

Insulation:

PVC rated 70oC as per IEC 189.2

Assembly:

Cores are twisted into pairs and pairs twisted together to form a cable core

Sheath:

Polyvinylchloride as per IEC 189-2 and rip cord is provided under the sheath for easy stripping

Temperature rating:

+5°C to +50°C during operation



COLOUR CODE OF INSULATION

No. of Pairs	A Wire	B Wire	No. of Pairs	A Wire	B Wire	Unit No.	Colour of Bindings
1	white	Blue	11	Black	Blue	1	Blue
2	White	Orange	12	Black	Orange	2	Orange
3	White	Green	13	Black	Green	3	Green
4	White	Brown	14	Black	Brown	4	Brown
5	White	Grey	15	Black	Grey	5	Grey
6	Red	Blue	16	Yellow	Blue	6	White
7	Red	Orange	17	Yellow	Orange	7	Red
8	Red	Green	18	Yellow	Green	8	Black
9	Red	Brown	19	Yellow	Brown	9	Yellow
10	Red	Grey	20	Yellow	Grey	10	Violet

Pakaging

Cables supplied on coils of (200m) or in non-returnable wooden drums.

PVC Insulated Multipairs

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20°C				
mm ²	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.4	1	1x0.4	153	0.15	0.6	3	12
	2	1x0.4	153	0.15	0.6	4.1	19
	3	1x0.4	153	0.15	0.6	4.2	23
	4	1x0.4	153	0.15	0.6	4.6	28
	5	1x0.4	153	0.15	0.6	5	33
	6	1x0.4	153	0.15	0.7	5.6	40
	7	1x0.4	153	0.15	0.7	5.9	44
	10	1x0.4	153	0.15	0.7	6.7	57
	15	1x0.4	153	0.15	0.7	7.9	79
	20	1x0.4	153	0.15	0.8	9.1	104
	25	1x0.4	153	0.15	0.8	10	125
	30	1x0.4	153	0.15	0.8	10.7	143
	40	1x0.4	153	0.15	0.9	12.4	191
	50	1x0.4	153	0.15	0.9	13.6	230
	60	1x0.4	153	0.15	0.9	14.7	270
	80	1x0.4	153	0.15	1	16.9	355
	100	1x0.4	153	0.15	1	18.6	430
	200	1x0.4	153	0.15	1.4	28	1012
300	1x0.4	153	0.15	1.5	33.4	1486	
400	1x0.4	153	0.15	1.6	38.4	1952	
0.5	1	1x0.5	97.8	0.15	0.6	3.4	16
	2	1x0.5	97.8	0.15	0.6	4.8	6
	3	1x0.5	97.8	0.15	0.6	4.9	32
	4	1x0.5	97.8	0.15	0.6	5.4	38
	5	1x0.5	97.8	0.15	0.6	5.9	45
	6	1x0.5	97.8	0.15	0.7	6.6	56
	7	1x0.5	97.8	0.15	0.7	7	63
	10	1x0.5	97.8	0.15	0.7	8	82
	15	1x0.5	97.8	0.15	0.7	9.5	114
	20	1x0.5	97.8	0.15	0.8	10.9	150
	25	1x0.5	97.8	0.15	0.8	12	180
	30	1x0.5	97.8	0.15	0.9	13.2	215



Telephone Cable

40	1x0.5	97.8	0.15	0.9	14.9	280
50	1x0.5	97.8	0.15	0.9	16.5	340
60	1x0.5	97.8	0.15	0.9	17.9	400
80	1x0.5	97.8	0.15	1	20.5	520
100	1x0.5	97.8	0.15	1	22.7	640
200	1x0.5	97.8	0.15	1.5	30.6	1350
300	1x0.5	97.8	0.15	1.6	37	2000

PVC Insulated Multipairs

TECHNICAL INFORMATION

Conductor size	Number of pairs	Conductor		Nominal insulation thickness	Nominal sheath thickness	Approximate overall diameter	Approximate net weight
		No.x dia.	Max. DC Res. At 20°C				
mm2	No.	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
0.6	1	1x0.6	67.9	0.15	0.6	3.6	19
	2	1x0.6	67.9	0.15	0.6	5.1	31
	3	1x0.6	67.9	0.15	0.6	5.2	38
	4	1x0.6	67.9	0.15	0.6	5.8	47
	5	1x0.6	67.9	0.15	0.6	6.4	57
	6	1x0.6	67.9	0.15	0.7	7.1	69
	7	1x0.6	67.9	0.15	0.7	8.7	77
	10	1x0.6	67.9	0.15	0.7	10.5	103
	15	1x0.6	67.9	0.15	0.8	12	150
	20	1x0.6	67.9	0.15	0.9	13.2	195
	25	1x0.6	67.9	0.15	0.9	14.3	235
	30	1x0.6	67.9	0.15	0.9	16.2	275
	40	1x0.6	67.9	0.15	0.9	17.9	355
	50	1x0.6	67.9	0.15	0.9	19.6	430
	60	1x0.6	67.9	0.15	1	22.3	515
	80	1x0.6	67.9	0.15	1	25.1	670
	100	1x0.6	67.9	0.15	1.2	26	845
150	1x0.6	67.9	0.15	1.4	26.7	1240	
200	1x0.6	67.9	0.15	1.5	30.71	1260	
250	1x0.6	67.9	0.15	1.6	34	2000	
0.8	1	1x0.8	37.5	0.25	0.7	6.4	30



Telephone Cable

2	1x0.8	37.5	0.25	0.7	6.5	50
3	1x0.8	37.5	0.25	0.7	7.3	62
4	1x0.8	37.5	0.25	0.7	7.9	78
5	1x0.8	37.5	0.25	0.7	9	91
6	1x0.8	37.5	0.25	0.9	9.5	115
7	1x0.8	37.5	0.25	0.9	11	128
10	1x0.8	37.5	0.25	0.9	13.1	171
15	1x0.8	37.5	0.25	0.9	14.8	240
20	1x0.8	37.5	0.25	0.9	16.5	310
25	1x0.8	37.5	0.25	1	17.9	385
30	1x0.8	37.5	0.25	1	20.3	450
40	1x0.8	37.5	0.25	1	22.9	580
50	1x0.8	37.5	0.25	1.2	24.8	735
60	1x0.8	37.5	0.25	1.2	28.7	865
80	1x0.8	37.5	0.25	1.4	31.7	1150
100	1x0.8	37.5	0.25	1.4	32.5	1410

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

MATV Cables

Application:

TV patented coaxial cables for satellite and digital installations.

Engineering Specification:

Conductor:

Solid plain copper

Insulation:

Cellular polyethylene

Shield:

Aluminium polyester with tinned or plain copper braid

Jacket:

Polyvinylchloride, white or black colour

Packing:

Available in easy – pull boxes 100m or 500m on wooden drums



TECHNICAL INFORMATION

Type: RG - 59 / U MATV

Conductor Diameter	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20oC	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%	100	8.2
0.81	3.71	100% Al /PET	6.16	75 ± 2%	53	82	200	11.5
		Tape + 40%					400	16.1
		T. CU braid					700	21.3

Type: RG - 11 / U MATV

Conductor Diameter	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20oC	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%	100	3.9
1.63	7.25	100% Al /PET	10.3	75 ± 2%	53	82	200	5.6
		Tape + 40%					400	7.9
		T. CU braid					700	11.5

MATV Cables

TECHNICAL INFORMATION

Type: RG - 6 / U MATV

Conductor Diameter	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20oC	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%		
1.02	4.59	100% Al /PET	7	75 ± 2%	53	82	100	6.6
		Tape + 40%					200	9.2
		T. CU braid					400	13.1
							700	17.4

Type: CF -160 MATV

Conductor Diameter	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20oC	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%		
1.14	5.1	100% Al /PET	7	75 ± 2%	53	82	100	6
		Tape + 70%					300	9
		T. CU braid					500	13
							800	16

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

RG Cables

Application:

Cables used for transmitting and receiving high frequency signals in radio frequency devices and connections.

Engineering Specification:

Conductor:

Solid or stranded plain / tinned copper

Insulation:

Solid polyethylene

Shield:

Plain or tinned copper braid

Jacket:

Polyvinylchloride, white or black colour

Packing:

Available in easy – pull boxes 100m or 500m on wooden drums



TECHNICAL INFORMATION

Type: RG - 58 / U

Conductor Mat. /Const.	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20°C	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%	100	14.8
CU / 1x0.82	2.95	96%	4.9	53 ± 2%	93	66	200	22.3
		T. CU braid					400	32.8
							700	45.9

RG Cables

Type: RG -216

Conductor Mat. /Const.	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20°C	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%		
CU / 7 x 0.4	7.25	95%	10.8	75 ± 2%	67.3	66	100	6.6
		2 CU braid					200	9.5
							400	13.8
							700	19

Type: RG - 8 / U

Conductor Mat. /Const.	Insulation Diameter	Shield type & Coverage	Outer Diameter	Nominal Impedance	Nominal Capacitance	Nominal Velocity of Propag.	Nominal Attenuation At 20°C	
							MHz	dB / 100 m
mm	mm	%	mm	Ohms	PF / m	%		
CU / 7 x 0.74	7.16	97%	10.29	52 ± 2%	96.8	66	100	6.2
		CU braid					200	8.9
							400	13.4
							700	26.2

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

PVC Insulation

Application:

This wire is used in the manufacture of electrical harnesses for cars and other automotive products.

Engineering Specification:

Conductor:

Soft annealed stranded fine wires according to DIN ISO 6722, part 3

Insulation:

Polyvinylchloride, according to DIN ISO 6722, part 2, class A

Colour coding :

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-40°C up to + to 90 °C



TECHNICAL INFORMATION

Conductor size	Conductor			Nominal insulation thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Approx. Diameter	Max. DC Res. At 20			
mm ²	No. x mm	mm	Ohm /Km	mm	mm	Kg/Km
0.5	16 x 0.21	1	37.1	0.6	2.2	9
0.75	24 x 0.21	1.2	24.7	0.6	2.4	12
1	32 x 0.21	1.35	18.5	0.6	2.6	15
1.5	30 x 0.26	1.7	12.7	0.6	2.9	20
2	40 x 0.26	2	9.42	0.6	3.2	26
2.5	50 x 0.26	2.2	7.6	0.7	3.6	32
3	60 x 0.26	2.5	6	0.7	3.9	37
4	56 x 0.31	2.75	4.71	0.8	4.4	49
6	84 x 0.31	3.3	3.14	0.8	4.9	68

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

Heat - Resistant PVC Insulation

Application:

This wire is used in the manufacture of electrical harnesses for cars and other automotive products.

Engineering Specification:

Conductor:

Soft annealed stranded fine wires according to DIN ISO 6722, part 3

Insulation:

Heat - resistant polyvinylchloride, according to DIN ISO 6722, part 2, class B

Colour coding :

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-40°C up to + to 105 °C



TECHNICAL INFORMATION

Conductor size	Conductor			Nominal insulation thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Approx. Diameter	Max. DC Res. At 20			
mm ²	No. x mm	mm	Ohm /Km	mm	mm	Kg/Km
0.5	16 x 0.21	1	37.1	0.6	2.2	9
0.75	24 x 0.21	1.2	24.7	0.6	2.4	11
1	32 x 0.21	1.35	18.5	0.6	2.6	14
1.5	30 x 0.26	1.7	12.7	0.6	2.9	19
2.5	50 x 0.26	2.2	7.6	0.7	3.6	31
4	56 x 0.31	2.75	4.71	0.8	4.4	49
6	84 x 0.31	3.3	3.14	0.8	4.9	68

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

Heat - Pressure Resistant PVC Insulation

Application:

This wire is used in the manufacture of electrical harness for cars and other automotive products.

Engineering Specification:

Conductor:

Soft annealed stranded fine wires according to DIN ISO 6722, part 3

Insulation:

Heat – resistant polyvinylchloride, according to DIN ISO 6722, part 2 class B

(hot pressure resistance test at 120°C)

Colour coding :

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-20°C up to + to 125 °C



TECHNICAL INFORMATION

Conductor size	Conductor			Nominal insulation thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Approx. Diameter	Max. DC Res. At 20°C			
mm ²	No. x mm	mm	Ohm /Km	mm	mm	Kg/Km
0.5	16 x 0.21	1	37.1	0.6	2.2	9
0.75	24 x 0.21	1.2	24.7	0.6	2.4	11
1	32 x 0.21	1.35	18.5	0.6	2.6	14
1.5	30 x 0.26	1.7	12.7	0.6	2.9	19
2.5	50 x 0.26	2.2	7.6	0.7	3.6	30
3	60 x 0.26	2.5	6.21	0.7	3.9	36

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

Cold - Resistant PVC Insulation

Application:

This wire is used in the manufacture of electrical harness for cars and other automotive products.

Engineering Specification:

Conductor:

Soft annealed stranded super fine wires

Insulation:

Cold- resistant polyvinylchloride, according to DIN ISO 6722, part 2, class A.

(Cold pressure resistance test at 120°C)

Colour coding :

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-40°C up to + to 90 °C



TECHNICAL INFORMATION

Conductor size	Conductor			Nominal insulation thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Approx. Diameter	Max. DC Res. At 20°C			
mm ²	No. x mm	Mm	Ohm /Km	mm	mm	Kg/Km
0.5	28 x 0.16	1.1	37.7	0.6	2.3	9
0.75	24 x 0.16	1.3	25.1	0.6	2.5	12
1	57 x 0.16	0.5	18.8	0.6	2.7	15
1.5	84 x 0.16	1.8	12.4	0.6	3	20

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

Concentric Conductors with PVC Insulation

Application:

This wire is used in the manufacture of electrical harnesses for cars and other automotive products.

Engineering Specification:

Conductor:

Concentric stranded copper conductor according to DIN ISO 72551, part 6, type A

Insulation:

Polyvinylchloride, according to DIN ISO 72551, part 5

Colour coding :

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-40°C up to + to 105 °C



TECHNICAL INFORMATION

Conductor size	Conductor			Nominal insulation thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Approx. Diameter	Max. DC Res. At 20°C			
mm ²	No. x mm	Mm	Ohm /Km	mm	mm	Kg/Km
0.35	7 x 0.26	0.8	52	0.2	1.3	4.5
0.5	19 x 0.19	1	37.1	0.22	1.6	6.6
0.75	19 x 0.23	1.2	24.7	0.24	1.9	9
1	19 x 0.32	1.35	18.5	0.24	2.1	11
1.5	19 x 0.32	1.7	12.7	0.24	2.4	16
2	19 x 0.37	2	9.42	0.24	2.6	22.5
2.5	19 x 0.41	2.2	7.6	0.28	3	26

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.

PVC Thin Insulation

Application:

This wire is used in the manufacture of electrical harnesses for cars and other automotive products.

Engineering Specification:

Conductor:

Fine wires stranded copper conductor according to DIN ISO 72551, part 6, type B.

Insulation:

Polyvinylchloride, according to DIN ISO 72551, part 5

Colour coding:

Two colours are marked by two diametrically opposed longitudinal stripes

Packing:

Cables are packed in carton boxes

Temperature range:

-40°C up to + to 105 °C



TECHNICAL INFORMATION

Conductor size	Conductor Details			Minimum insulation thickness	Approximate overall diameter	Minimum Concent. Factor	Approximate net weight
	No. x dia.	Approx. Diameter	Max. DC Res. At 20°C				
mm ²	No. x mm	mm	Ohm /Km	mm	mm	%	Kg/Km
0.35	12 x 0.21	0.9	52	0.2	1.4	55	4.5
0.5	16 x 0.21	1	37.1	0.22	1.6	55	6.6
0.75	24 x 0.21	1.2	24.7	0.24	1.9	55	9
1	32 x 0.21	1.35	18.5	0.24	2.1	55	11
1.5	30 x 0.26	1.7	12.7	0.24	2.4	55	16
2	30 x 0.31	1.9	9.31	0.24	2.6	55	22.5
2.5	50 x 0.26	2.2	7.6	0.28	3	55	26
3	45 x 0.31	2.4	6.21	0.28	3.2	55	32.5
4	56 x 0.31	2.75	4.7	0.32	3.7	55	42
6	84 x 0.31	3.3	3.1	0.32	4.3	55	61



HO5VV-F

Application:

These cables can be used for domestic cooking and heating appliances provided that the cable does not come into contact with the heating elements.

Engineering Specification:

Standard:

BS 6500

Rated Voltage:

300 / 500 V

Conductor:

Stranded plain annealed copper as per BS - 6360

Insulation:

PVC type TI – 2 as per BS - 6746

Colour code:

Blue, Brown

Three cores:

Green / Yellow, Blue, Brown

Four Cores:

Green / Yellow, Black, Blue, Brown.

Assembly:

Cores twisted together to form a round cable

Sheath:

PVC type TM-2 as per BS6746 - white colour

Temperature rating:

+5°C up to + 70°C



TECHNICAL INFORMATION

Conductor size	Conductor		Nominal insulation thickness	Nominal Sheath Thickness	Approximate overall diameter	Approximate net weight
	No. x dia.	Max. DC Res. At 20°C				
mm ²	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
2 x 0.75	24 x 0.2	26.4	0.6	0.8	6.5	61
2 x 1.0	32 x 0.2	19.5	0.6	0.8	6.8	70
2 x 1.5	30 x 0.25	13.3	0.7	0.8	7.7	91
2 x 2.5	50 x 0.25	7.98	0.8	1	9.4	139
2 x 4	56 x 0.3	4.95	0.8	1.1	10.7	192
3 x 0.75	24 x 0.2	26.4	0.6	0.8	6.9	73
3 x 1.00	32 x 0.2	19.5	0.6	0.8	7.2	85
3 x 1.5	30 x 0.25	13.3	0.7	0.9	8.4	114
3 x 2.5	50 x 0.25	7.98	0.8	1.1	10.2	175
3 x 4	56 x 0.3	4.95	0.8	1.2	11.6	244
4 x 0.75	24 x 0.2	26.4	0.6	0.9	7.7	91
4 x 1.0	32 x 0.2	19.5	0.6	0.9	8.1	106
4 x 1.5	30 x 0.25	13.3	0.7	1	9.3	142
4 x 2.5	50 x 0.25	7.98	0.8	1.1	11.1	211
4 x 4	56 x 0.3	4.95	0.8	1.2	12.6	297



HO3VV-F

Application:

These cables are useful in domestic premises, kitchens, offices or light duties for light portable appliances.

Engineering Specification:

Standard:

BS 6500

Rated Voltage:

300 / 300 V

Conductor:

Stranded plain annealed copper as per BS - 6360

Insulation:

PVC type TI – 2 as per BS - 6746

Colour code:

Blue, Brown

Three cores:

Green / Yellow, Blue, Brown

Four Cores:

Green / Yellow, Black, Blue, Brown

Assembly:

Cores twisted together to form a round cable
For flat cables, two cores re laid parallel

Sheath:

PVC type TM-2 as per BS6746 - white colour

Temperature rating:

-5oC up to + 70oC



TECHNICAL INFORMATION

Conductor size	Conductor		Nominal insulation thickness	Nominal Sheath Thickness	Approximate overall diameter	Approximate net weight
	No.x dia.	Max. DC Res. At 20°C				
mm ²	No. x mm	Ohm /Km	mm	mm	mm	Kg/Km
2 x 0.5	16 x 0.2	39	0.5	0.6	3.6 x 6.0	30
2 x 0.5	16 x 0.2	39	0.5	0.6	5.2	40
2 x 0.75	24 x 0.2	26.4	0.5	0.6	3.9 x 6.4	40
2 x 0.75	24 x 0.2	26.4	0.5	0.6	5.7	49
3 x 0.5	16 x 0.2	39	0.5	0.6	5.6	48
3 x 0.75	24 x 0.2	26.4	0.5	0.6	6	60
4 x 0.5	16 x 0.2	39	0.5	0.6	6.1	58
4 x 0.75	24 x 0.2	26.4	0.5	0.6	6.6	72

- The above data are approximate and subject to normal manufacturing tolerance.
- Other types can be provided on specific request.




Flat Cords:

Suitable Cables:

HO3VV-F : 2 x 0.75

HO5VV-F : 2 x 0.75

HO5VV-F : 2 x 1.0

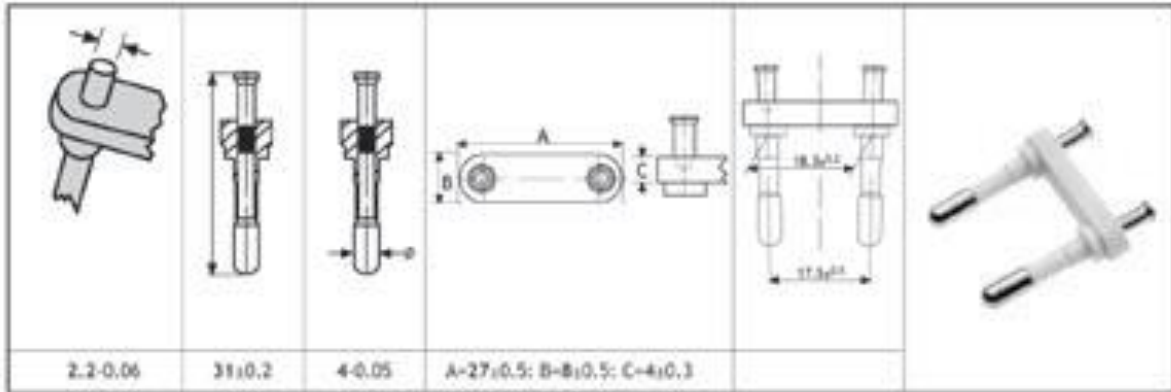

Group:

PVC Pug for Safety Class II

Voltage rating

300 / 300 V & 300 / 500 V only allowed for double insulated appliances

Description:

Straight flat plug without earthing contact

Material :

Glass – reinforced polyamide, black or white colour

Permitted current rating:

2.5 Amps AC or 10 Amps AC

Permitted Voltage:

250 V AC

Pins:

4.0 mm Ø solid metal

Pins, nickel – plated


Round Cords with Double Earthing System

Suitable Cables:

HO5VV-F : 3 G 0.75

HO5VV-F : 3 G 1.0

HO5VV-F : 3 G 1.5

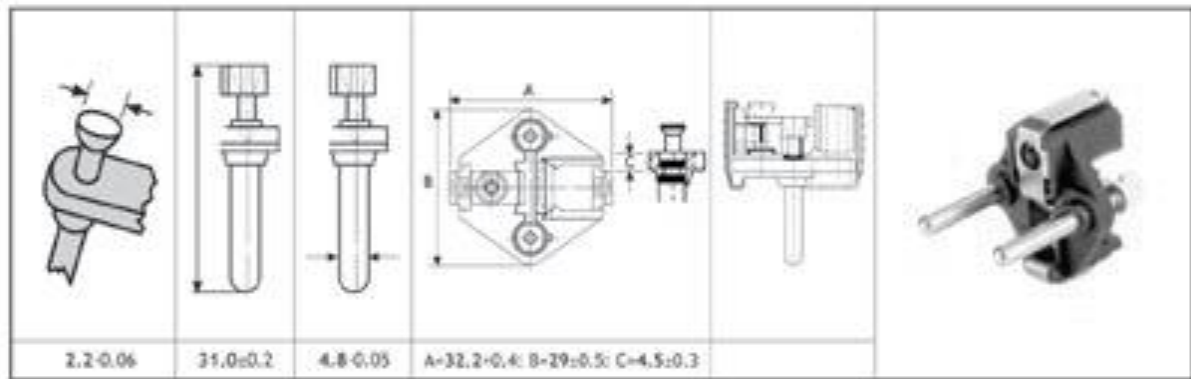

Group:

PVC Pug for Safety Class I

Voltage rating

300 / 500 V

Description:

2- pin angled plug with double earthing system

Material :

PBTP 30% glass – reinforced, anthracite black or white colour

Permitted current rating:

10 / 16 Amps AC

Pins:

4.8 mm Ø solid metal

Pins, nickel – plated




Round Cords with Double Earthing System

Suitable Cables:

HO3VV-F : 3 G 0.75

HO5VV-F : 3 G 0.75

HO5VV-F : 3 G 1.0

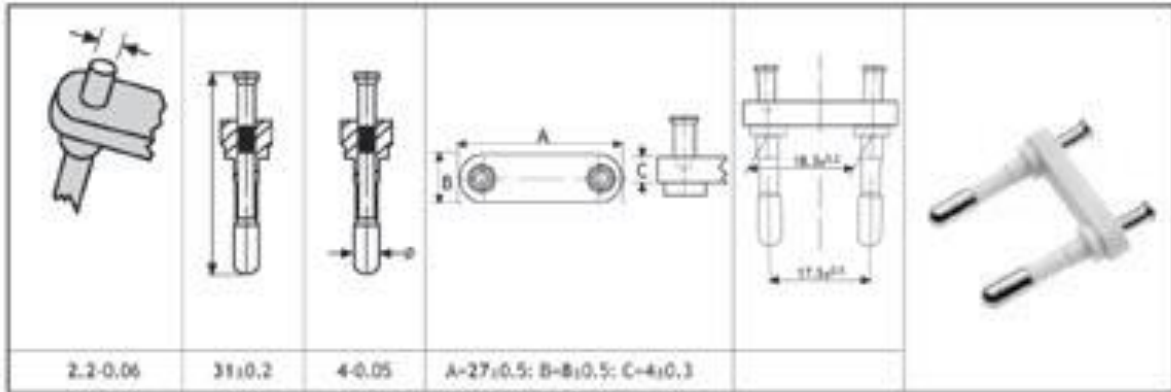

Group:

PVC Plug for Safety Class I

Voltage rating:

300 / 300 V & 300 / 500 V

Description:

2 - pin angled plug with lateral earthing system

Material :

PBTP 30% glass – reinforced, anthracite black
or white colour

Permitted current rating:

10 / 16 Amps AC

Pins:

4.8 mm Ø solid metal

Pins, nickel – plated



DC resistance of conductor:

DC resistance per unit length of the conductor at another conductor temperature t is given by:

$$R = R_0 [1 + \alpha_{20} (t - 20^\circ\text{C})]$$

Where:

R = DC resistance at temperature t °C Ω/Km

R_0 = DC resistance at temperature 20°C Ω/Km

t = conductor temperature °C

α_{20} = temperature coefficient at 20°C $1/^\circ\text{C}$

AC Resistance of Conductor:

To calculate the AC resistance of the conductor at its operating temperature the following formula is used:

$$R_{ac} = R (1 + K_p + K_s)$$

Where:

K_p and K_s are proximity effect and skin effect factors

Inductance:

Self mutual inductance is defined as follows:

$$L = K + 0.2 \ln \left(\frac{25}{d} \right)$$

Where:

L = Inductance in mH / Km

K = A constant depending on the number of wires in the conductor

d = Conductor diameter in mm

n = Axial spacing between cables in trefoil formation in mm

= $1.26 \times$ axial spacing between cables in flat formation in mm

Capacitance:

The mutual capacitance of the pairs or adjacent cores shall not exceed a maximum of 250 PF/m at a frequency of 1KHz

1- Mutual capacitance of unshielded twisted pair

$$C = \frac{7.218\varepsilon}{\log\left(\frac{1.3D}{fd}\right)}$$

2- Mutual capacitance of shielded twisted pair

$$C = \frac{21.14\varepsilon}{\log\left(\frac{1.2D}{fd}\right)}$$

3- Mutual capacitance of overall shielded & cables

$$C = \frac{9.515\varepsilon}{\log\left(\frac{1.5D}{fd}\right)}$$

Where:

C : Mutual Capacitance In PF/m

ε : Dielectric constant of insulation material

D : Diameter over insulation in mm

d : Diameter over conductor in mm

L / R ratio:

The L / R ratio for adjacent cores shall not exceed the following maximum value:

Conductor mm ²	Maximum L/R ratio
	μH / Ω
0.5	25
0.75	25
1.5	40

Impedance Zo (ohms):

$$1- \text{Unshielded twisted pair : } Z_o = \frac{310\sqrt{\epsilon}}{C} \quad \Omega$$

$$2- \text{Shielded twisted pair : } Z_o = \frac{276}{\sqrt{\epsilon}} \log \left(\frac{1.2D}{f (d)} \right) \quad \Omega$$

$$3- \text{Overall shield \& cabled : } Z_o = \frac{347}{\sqrt{\epsilon}} \log \left(\frac{1.5D}{f (d)} \right) \quad \Omega$$

Where:

C : Mutual Capacitance In PF/m

ϵ : Dielectric constant of insulation material

f : Stranding factor depend on no. of wires in conductor

D : Diameter over insulation in mm

d : Diameter over conductor in mm

Attenuation:

The power loss in an electrical system, in cables, generally expressed in decibels (dB) per unit length

$$\text{Attenuation : (A)} = 86.8 \sqrt{\frac{RGW}{2}}$$

Where:

A: Attenuation in dB per 100 ft

R: Resistance (AC)

G: Conductance

W: $2\pi f$ (f= test frequency MHz)

Velocity of Propagation:

The speed of an electrical signal down a length of cable compared to speed in free space expressed as a percent.

It is inversely proportional to the dielectric constant. Lowering the dielectric constant. Lowering the dielectric constant increases the velocity

$$V_p = \frac{1}{\sqrt{\epsilon}} \text{ or } V_p = \frac{1}{\sqrt{LC}}$$

Where:

E : Dielectric constant

L: Inductance

C: Capacitance



Technical Information

Dielectric medium or material	Vp
	(%)
Air	100
Solid polyethylene	65.9
Foamed polyethylene	80
PVC	45



Fire Resistant cables:

A cable can be described as fire resistant when it complies with the severe test in IEC 331 in which the middle portion of a sample of cable 1200 mm long is supported by two metal rings 300 mm apart and exposed to the flame from a tube type gas burner at 750°C. Simultaneously the rated voltage of the cable is applied continuously throughout the test period. Furthermore, not less than 12 hours after the flame has been extinguished, the cable is reenergized. No electrical failure must occur under these conditions.

Halogen Free Material:

What are Halogens?

Halogens are salts of the elements Fluorine, Chlorine, Bromine and Iodine.

Fluorine and chlorine are important in cable design. For example; Fluorine, Chlorine and Bromine are common components of flame protection additives.

When is a cable Halogen-free?

The burning behavior of cables is very important for the safety of buildings and also in control plants.

Consequently the following points are important:

- Behavior under flame influence ie. the inflammability as the propagation of fire.
- Development of smoke density (darkening of emergency exits, hindrance of the fire fighters).

Cables produced of non halogen – free materials such as those with chlorine in the molecule – chain : polyvinylchloride (PVC), chloroprene rubber (CR), chlorinated polyethylene (CM), have a better behavior in case of fire.

These are barely combustible or not flammable and self-extinguishing, in case of fire molecules of Chlorine (or Fluorine) are released which hinder the access of oxygen at the fire location and hence suffocate the flame.

The disadvantage of these materials is that the released Chlorine (or Fluorine) atoms combine with hydrogen which is decomposed from the plastic material as well as hydrochloric acid or hydrofluoric acid from the existing air. These compounds are extremely corrosive and toxic in consequence, damage by corrosion may be higher than the damage caused by fire.

Halogen-free cables contain no halogens, ie. the insulation and sheath materials of these cables are composed of polymers of pure hydrocarbons. Burning these materials, produce no corrosive compounds or toxic gases, only water vapor and carbon dioxide gas.

For maximum security halogen free cable must be hardly flammable and self-extinguishing . This is achieved by using special polymer compounds, containing high percentages of flame protective materials.

Application:

Halogen-free cable are increasingly specified for public buildings and areas where large numbers of people may be present.

LAN Cables:

The necessity to communicate through digital information, to share data, to reach calculation – resources and to share costly devices has encourages the development of local area networks. A local area network (LAN) is a computer network linking users in a small area. Generally, a local area network connects users located either in the same office, or at the same floor, or in the same building. The success of local area networks is due to their ability to satisfy communication needs at a reasonable price. Compatibility is a critical element.

Local area networks require high-speed channels for data-transmission, permitting the transfer of large blocks of data, images, and video-signals.

The technology used in local networks can reach a transmission rate which is higher than 100 Mbps, ie. higher

than that of traditional direct connections. Moreover, the traditionally low transfer – capacity of public telecommunications is increasing therefore the distinction between direct connection, local area networks and wide area networks is going to loose significance, at least as far as transmission – capacity is concerned. The transmission media is the cable. Common media are phone-pairs, coaxial cables and purpose designed LAN cables which are essentially extremely high performance telephone pairs, sometimes provided with shielding. This kind of shielded cable is more immune to electrical interference and permits high speed transmission over longer distances. Pairs are still the most versatile media for transmission and are often the best choice for new network installations.

Attenuation:

The reduction in a transmitted signal as it passes through wires or equipment in an electrical circuit.

MAXIMUM ATTENUATION VALUES OF CAT 5

Frequency (MHz)	Maximum attenuation dB
0.1	N / A
1	2.5
4	4.8
10	7.5
16	9.4
20	10.5
31.25	13.1
62.5	18.4
100	23.2

Characteristic Impedance:

The nominal differential characteristic impedance of a cabling link shall be 100Ω at frequencies between 1 MHz and the highest specified frequency for the cabling class. The tolerance of the characteristic impedance in a given link shall not exceed the chosen nominal impedance by more than + 15Ω from 1Mhz up to the highest specified frequency for the class.

Near end crosstalk loss (Next):

The near-end crosstalk loss of a link shall meet or exceed the values shown in table below, and shall be consistent with the design values of cable length and cabling materials used.

MAXIMUM NEXT LOSS OF CAT 5

Frequency (MHz)	Maximum attenuation dB
1	54
4	45
10	39
16	36
20	35
31.25	32
62.5	27
100	24

Attenuation to crosstalk loss ration (ASR):

This is the difference between the crosstalk and the attenuation of the link in dB.

$$ACR(dB) = a_n(dB) - a(dB).$$

Return loss:

The return loss of the cabling, measured at any interface, shall meet or exceed the values shown in the table below:

Frequency (MHz)	Maximum attenuation dB
$1 \leq F < 10$	18
$10 \leq F < 16$	15
$16 \leq F < 20$	15
$20 \leq F < 100$	10



Coaxial Cable :

A cable consisting of two cylindrical with a common axis, separated by a dielectric

Electrical Parameters:

1- Characteristic Impedance: $Z_0 = \frac{138}{\sqrt{\epsilon}} \log \left(\frac{D}{d} \right) \Omega$

2- Velocity of Propagation: $V_p = \frac{100\%}{\sqrt{\epsilon}}$

3- Capacitance: $C = \frac{24.148\epsilon}{\log \left(\frac{D}{d} \right)} \text{PF/m}$

4- Inductance: $L = 0.459 \log \left(\frac{D}{d} \right)$

5- Braiding Details:

Braid angle: $\Phi = \tan^{-1} \left(\frac{2 \left(\frac{+e}{C} \right)^p}{C} \right) \text{Degrees}$

Braid picks per cm: $p = \frac{0.394(c) \tan}{2 M}$

Braid resistance: $R = \frac{r}{n(C) (\cos)}$

Where:

D = Diameter under shield in mm

d = conductor diameter in mm

ε = dielectric constant of insulation

= 1.56 cellular polyethylene

= 2.26 solid polyethylene

C= number of carriers

n = number of wires in one carrier

M = D + build of braid on one shield wall in mm

e = diameter of each wire in mm

R = DC resistance of the braid in ohm/km

r = DC resistance of each wire in ohm/km

p = picks per cm



Packing:

1- LAN Cable:

Available in easy – pull boxes of 1000 feet (305m) capacity.

This assures the cable will not be damaged during installation due to the “figure 8” coiling.

It also enables easy, tidy storage before and during installation.

2 - Coaxial Cable:

Available in easy – pull boxes of 100 m or 500m on wooden drum.

3 - Telephone Cable:

Cables supplied on coils of (200m) or in non-returnable wooden drums.


4 - Automotive wires:

Wires are packed in Carton boxes which reduces storage area & cost.

Boxes may be delivered individually or as a solid cube on wooden pallet.

5- Instrumentation, Fire Resistant and Control Cables:

International practice is to supply cables on wooden drums. At the customers request we will also supply on steel drums for improved on-site performance and handling.

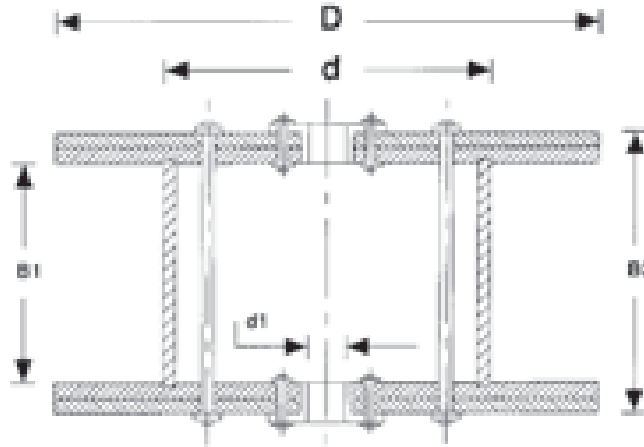

DRUM DIMENSIONS

D	D	d1	B1	B2	W1	W2
600	300	85	410	530	16	300
700	350	85	410	530	20	350
800	400	85	410	530	24	400
1000	500	85	610	710	46	800
1250	580	85	580	680	60	1700
1400	700	85	800	950	160	2000
1600	700	110	800	950	170	2500
1800	920	110	900	1050	240	3000
2000	1020	110	1200	1350	335	4000

Where:

D : Flange diameter	mm.
d : Barrel diameter	mm.
d1: Axis hole diameter	mm.
B1 : Distance between flanges	mm.
B2 : Overall width	mm.
W1: Approximate net weight of drum	Kg.
W2: Maximum gross weight of drum	Kg.



Technical Information

Weight – Imperial

Ounces	28.495
Pounds (AV)	453.59
Pounds (AV)	0.45359
Tons (short)	907.19
Tons (long)	1016.05

Weight – Metric

Grams	0.03527
Grams	0.002205
Kilograms	35.274
Kilograms	2.2046
Kilograms	0.001102
Kilograms	0.0009842
Millimeters	0.03937

Miscellaneous – Imperial

Pounds per 1000 feet	1.48816
Pounds per mile	0.28185
Pounds per square inch	0.0007031
Pounds per square inch	0.07031
Pounds per cubic	27.68
Feet per second	18.288
Feet per second	1.09728
Miles per hour	1.60935
Ohms per 1000 feet	3.28083
Ohms per mile	0.62137
Decibels per 1000 feet	3.28083
Decibels per mile	0.62137
Decibels	0.1153

Miscellaneous – Metric

Kg / Km	0.67197
Kg / Km	3.54795
Kg. per square mm	1422.34
Kg. per square cm	14.2234
Grams per cubic cm	0.03613
Meters per minute	0.05468
Kilometers per hour	0.91134
Kilometers per hour	0.62137
Ohms per kilometer	0.3048
Ohms per kilometer	1.6093
Decibels per kilometer	0.3048
Decibels per kilometer	1.6093

Length – Imperial

grams	Mils	0.001	Inches
grams	Mils	0.0254	mm
kilograms	Inches	1000	Mils
kilograms	Inches	25.40	Mm
kilograms	Inches	2.54	Cm
	Feet	30.48	Cm
Ounces	Feet	0.3048	Meters
Pounds	Feet (thousands of)	0.3048	Kilometers
Ounces	Yards	0.9144	Meters
Pounds	miles	1.3093	Kilometers
Tons (short)	Length-metric		
Tone (long)	Millimeters	39.37 Mils	
inches			

Centimeters	0.3937	Inches
Centimeters	0.032808	Feet
Meters	39.37	Inches
Meters	3.2808	Feet
Meters	1.0936	Yards
Kilometers	3280.83	Feet
Kilometers	0.62137	Miles

Area – Imperial

Square mils	1.2732	Circular mils
Square mils	0.000001	Square inches
Circular mils	0.7854	Square mils
Circular mils	0.0000007954	Square inches
Square mils	0.0005037	Square mm.
Square inches	1000000	Square mils
Square inches	1273240	Circular mils
Square inches	645.16	Square mm
Square inches	645.16	Square cm.
Square feet	0.09290	Square meters
Square yards	0.8361	Square meters

Area – Metric

Square millimeters	1973.52	Circular mils
Square millimeters	0.00155	Square inches
Square centimeters	0.155	Square inches
Square meters	10.7638	Square feet
Square meters	1.19599	Square yards

www.cncuxc.com

Add: INDUSTRIAL PARK, GONGYI, HENAN, P. R. CHINA / Code: 450042

Tel.: 0086-371- 5508-3768 / Fax: 0086-371- 5508-3768

* HNXC--- TRANS MORE *



Technical Information

Temperature

Fahrenheit	$5/9(*F)-32$	*Celsius
Celsius	$9/5(*C)+32$	* Fahrenheit

Volume – Imperial

Cubic inches	16.38716	Cubic cm.
Cubic feet	0.028317	Cubic meters.
Volume – U. S.		
Quarts (liquid)	0.9463	Liters
Gallons	3.7854	Liters

Volume – Metric

Cubic cm	0.06102	Cubic incuse
Cubic meters	35.3145	Cubic feet.
Liters	1.05668	Quarts.(liquid U.S)
Liters	0.26417	Gallons (U.S.)



A

Area of conductor

The size of conductor cross-section measured in circular mils, square inches, etc.

Armor

A braid or wrapping of metal, usually steel, used for mechanical protection.

Armored cable

A cable having a metallic covering for protection against mechanical injury.

Astm

The American society for Testing and materials

Attenuation

The reduction in a transmitted signal as it passes through wires or equipment in an electrical circuit.

AWG

Abbreviation for American wire gauge.

Abrasion Resistance:

Ability of a material or cable to resist surface wear.

A.C. Resistance

The total resistance offered by a device to alternating current circuit due to inductive and capacitive effects, as well as the

Alternating voltage:

The voltage developed across a resistance or impedance through which alternating current is flowing.

Ambient temperature

The normal temperature within a given area

American wire gauge

A standard used in the determination of the physical size of a conductor determined by its circular mil area. Usually expressed as AWG. Also referred to as brown and sharpe (B&S) wire gauge.

Ampacity:

The maximum current an insulated wire or cable can safely carry without exceeding either the insulation or jacket material limitations (Same as current carrying capacity).

Ampere

The unit current. One ampere is the current flowing through one ohm of resistance at one volt potential .

Anneal

To subject to high heat with subsequent cooling. When annealing copper, the act of softening the metal by means

of heat to render it less brittle

Active current

In an alternating current, a component in phase with the voltage. The working component as distinguished from the idle or wattless component.

Aerial cable

A cable suspended in the air on poles or other overhead structure.

Air core cable

A telephone cable in which the interstices in the cable core are not filled with a moisture blocking material.

Air spaced coaxial cable

One in which air is the essential dielectric material. A spirally wound synthetic filament or spacer may be used to center the conductor.

Alpeth

A telephone cable having an aluminum shield and a polyethylene jacket.

Alternating current (A.C.)

An electric current that continually reverses its direction giving a repetitive plus and minus wave form at fixed intervals.

of heat to render it less brittle

Anode

The electrode through which a direct current enters the liquid, gas or other discrete part of an electrical circuit; the positively charged pole of an electrochemical cell.

Appliance wire and cable

Appliance wiring material is a classification of underwriters' laboratories, inc., covering insulated wire and cable, internal wiring of appliances and equipment. Each construction satisfies the requirements for use in particular applications.

B

Balance circuit

A circuit so arranged that the impressed voltage on each conductor of the pair are equal in magnitude but opposite in polarity with respect to ground.

Band width

The frequency range of transmitted electrical signals, expressed in Hertz.

Bare conductor



A conductor having no covering. A conductor with no coating

Bedding

A layer of material applied to a cable immediately below the armoring.

Binder

A spirally served tape or thread used for holding assembled cable components in place awaiting subsequent manufacturing operations.

Bonded flat cable

Flat cable consisting of individually insulated conductors lying parallel and bonded together typically for application in electronics, telecommunications. Or computers.

Braid

A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires.

Braid angle

The smaller of the two angles formed by the shielding strand

C

Colour Code

A colour system for circuit identification by use of solid colours, tracers, braids, surface printing, etc.

Composite cable

A cable consisting of two or more different types or sizes of wires.

Concentricity

In a wire or cable, the measurement of the location of the center of the conductor with respect to the geometric center of the circular insulation.

Concentric Stranding

A group of wires twisted so as to contain a center core with one or more distinct layers of spirally wrapped, wires laid overall.

Conductance

The ability of a conductor to carry electric current. It is the reciprocal of resistance and is measured in Mhos.

Conductivity

A term used in describing the capability of a material to carry an electrical charge. Usually expressed as a percentage of copper conductivity copper being one hundred (100%) percent.

Conductor

Any material capable of transferring electrical charge easily.

Control cable

A multi-conductor cable made for operation in control or signal

or cladding on the copper.

and the axis of the cable being shielded.

Breakdown of insulation

Failure of an insulated conductor resulting in a flow of current through the insulation. It may be caused by the application of excess voltage or by defects or decay.

Breakdown voltage

The voltage at which the insulation between two conductors breaks down.

Bunched Strand

Any number of conductor strands twisted together in one direction with the same lay length.

Buried Cable

A cable installed directly in the ground without use of underground conduit. Also called "direct burial cable".

circuits.

Core

In cables, a term used to denote a component or assembly of components, over which other materials are applied, such as additional components, shield, sheath, or armor.

Cross-Sectional Area

The area of the cut surface of an object cut at right angles to the length of the object.

Crosstalk

Signal interference between nearby conductors caused by pickup of stray energy. It is also called induced interference.

Cure

To change the physical properties of a material by chemical reaction, by the action of heat and catalysts, alone or in combination, with or without pressure.

Current

The rate of flow of electricity in a circuit, measured in amperes.

Current Carrying Capacity

The maximum current an insulated conductor or cable can continuously carry without exceeding its temperature rating. It is also called ampacity.

Current, Direct (D.C.)

Electrical current whose electrons flow in one direction only; it may be constant or pulsating as long as their movement is in



the same direction.

Cycle

The complete sequence of alternation or reversal of alternation or reversal of the flow of an alternating electric current. (See Hertz)

Cable

A group of individually insulated conductors in twisted or parallel configuration, with or without an overall covering.

Cable, Star Quad

A multicore radio or television relay cable in which the conductors are arranged in quads and each quad consists of four conductors twisted together, the diagonally opposite conductors constituting a pair circuit. Also known as spiral four cable.

Cabling

The act of twisting together two or more insulated components by machine to form a cable.

Capacitance:

Storage of electrically separated charges between two plates having different potentials.

The value depends on the surface area of the plates and the distance and material between them.

Capacitance, Direct:

The capacitance measured directly with all other conductors, including shield, short circuited to ground.

Capacitance, Mutual

The capacitance between two conductors with all other conductors, including shield, short circuited to ground.

Capacitance unbalance

The inequalities of the capacitances of the wires of a telephone circuit to other wires or to earth which produce interference. Various forms of unbalance arise according to the circuits concerned in the measurement, hence

D

D.C.

Abbreviation for "Direct Current"

Decibel (dB)

A unit to express differences of power level. Used to express power gain in amplifiers or power loss in passive circuits or cables.

Dielectric Constant (K)

side-to-side, pair – to- pair unbalance.

Capacitance unbalance to ground

An inequality of capacitance between the ground capacitance the conductors of a pair which results in a pickup of external source energy, usually from power transmission lines.

Capacitance coupling

Electrical interaction between two conductors caused by the capacitance between them.

Characteristic impedance

The impedance that , when connected to the output terminals of a transmission line of any length, makes the line appear infinitely long. The ratio of voltage to current at every point along a transmission line on which there are no stranding waves.

Charge

The quantity of electricity held statically in a capacitor or an insulated conductor.

Circular Mil

A measurement used in determining the area of wire. The area of a circle one thousandth (.001) of an inch in diameter.

Coating

A material applied to the surface of a conductor to prevent environmental deterioration, facilitate soldering or improve electrical performance.

Coaxial Cable

A cable consisting of two cylindrical conductors with a common axis, separated by a dielectric.

Cold Test

Any test to determine the performance of cable during or after subjection to a specified low temperature for a specified time

The ratio of the capacitance of a capacitor (or consoles) with dielectric between the electrodes to the capacitance with air is between the electrodes. Also called permittivity and specific inductive capacity.

Dielectric Strength

The voltage which an insulation can withstand before breakdown occurs. Usually expressed as a voltage gradient (such as volts per mil).



Dielectric test

A test in which a higher than the rated voltage is applied for a specified time to determine the adequacy of the insulation under normal conditions.

Direct capacitance

The capacitance measured directly from conductor to conductor through a single insulation layer.

Direction of Lay

The direction, either clockwise or counterclockwise, of a conductor or group of conductors when looking axially down a cable length.

Drain Wire

In a cable, an uninsulated wire laid over the component or component and used as a ground connection. Normally laid in contact with a metallic foil shield.

Drawing

In the manufacturing of wire, pulling the metal through a die or series of dies for reduction of diameter to a specified size.

Drop Wire

A telephone cable, usually consisting of one insulated telephone pair, which is used to connect a subscribers premises to open wires lines on poles.

Filler

- (1) A material used in the cable to fill large interstices between electrical components;
- (2) A substance, often inert, added to a compound to improve properties and / or decrease cost.

Film

A thin plastic sheet.

Flame Resistance

Ability of the material to extinguish flame once the source of heat is removed

Flat cable

A cable with two essentially flat surfaces

Flexible Cable

A cable containing one or more cores, each formed of a group of wires, the diameters of the wires, the diameters of the wires being sufficiently small to afford flexibility.

Flexibility

The ease with which a cable may be bent

Foamed Plastics

Plastic insulations having a cellular structure.

Foamskin

Polyethylene foam insulation

Frequency

Number of times an alternating current reverses itself in one second. Expressed in Hertz (Hz), which is one cycle per second.

G

Gauge

A term used to denote physical size.

H

Harness

An arrangement of wires and cables, usually with many breakouts, which have been tied together or pulled into a rubber or plastic sheath, used to interconnect electric circuit.

Heat Resistance

Ability of a substance to maintain physical chemical and electrical integrity under specified temperature conditions.

Henry

Unit of inductance such that the induced voltage in volts is numerically equal to the rate of change of current in amperes per second.

Hertz (Hz)

A term replacing cycles-per seconds as a unit of frequency.

High Temperature wire and cable

Those electrical wires and cable having thermal operating characteristics of 150°C and higher.

Hz

Abbreviation for Hertz.

E

Eccentricity

Like concentricity, a measure of the center of a conductor's location with respect to the circular cross-section of the insulation; expressed as a percentage of center displacement of one circle within the other.

EIA

Abbreviation for Electronic Industries Association.

Elongation

The fractional increase in length of a material stressed in tension.



Embossing

A means of identification or lettering using heat and or pressure to leave raised lettering on the sheath material of the cable.

Emergency overloads

Loads which occur when larger than normal currents are carried through a cable or wire over a short period time.

Extrusion

The process of continuously forcing a plastic or elastomer and a conductor core through a die, thereby applying a continuous coating of insulation or jacket to the core or conductor.

ICEA

Insulated Cable Engineers Association (formerly IPCEA).

Impedance

The total opposition that a circuit offers to the flow of alternating current or any other varying current at a particular frequency. It is a combination of resistance R and reactance X, measured in ohms.

Impulse (Or pulse)

A surge of unidirectional polarity.

Induced Current

An electric current set up in a circuit by interacting electrical fields a current caused by electromagnetic induction.

Inductance

The property of a circuit element that opposes a change in current flow, thus causing current change to lag behind voltage changes. It is measured in Henrys.

Induction

The phenomenon of a voltage, magnetic field or electrostatic charge being produced in an object by lines of force from the source of such fields.

Inductive coupling

Crosstalk resulting from the action of the electromagnetic field of one conductor on the other.

Insulation

A non-conductive material usually surrounding or separating two conductive materials. Often called the dielectric in a radio frequency cable.

IEC

International Electrotechnical Commission, Similar to the ISO in structure and scope.

IEEE

Institute of Electrical and Electronic Engineers.

F

Farad

A unit of electrical capacity

Fext

Far end crosstalk

Figure 8 cable

An aerial cable configuration in which the conductors and the strand which supports the cable are integrally jacketed a cross-section of the finished cable approximates the figure "eight".

Insulation Resistance

That property of an insulating material which resists electrical current flow through the insulating material when a potential difference is applied.

Insulation Thickness

The wall thickness of the applied insulation

Interference

Any undesired electrical signal induced into a conductor by electrical or electromagnetic means (Noise)

ISO

International Standards Organization

Longitudinal shield

A tap shield, flat or corrugated, applied longitudinally along the axis of the cable core being shielded

Loop Resistance

The total resistance of two conductors measured round trip from one end.

Loss Factor

The product of the dissipation and dielectric constant of an insulating material.

M

Marker Tape

A tap laid parallel to the conductors under the sheath in a cable, imprinted with the manufacture's name and the specification to which the cable is made.

Other information such as date of manufacture may



Glossary

also be included.

MCM

One thousand circular Mils.

Megohm

One million ohms

Mho

The unit of conductivity. The reciprocal of an ohm.

Mhz

Megahertz (one million cycles per second)

Microphonics

Noise in a system caused by mechanical vibration of components within the system.

Microwave

A short (usually less than 30cm.) Electrical wave.

Mill

A unit used in measuring diameter of a wire or thickness of insulation over a conductor. One onethousandth of an inch (0.001").

Moisture Resistance

The ability of a material to resist absorbing moisture from the air or when immersed in water.

Multi-Conductor

More than one conductor within a single cable.

Mutual inductance

The ratio of voltage induced in one conductor to the time rate of current change in the separate conductor causing this induction.

Mylar

DuPont trademark for polyethylene terephthalate (polyester) film used in the form of a tape.

J

Jacket

A material covering over a wire insulation or an assembly of components. An overall jacket on a complex cable grouping is also often referred to as a sheath.

K

Kilohertz

1.000 Hertz (cycles per second)

Kilovolt

A term denoting 1000 volts.

Kilowatt

A term denoting 1000 watts.

Next

Near end crosstalk

O

Ohm

Unit of resistance such that a constant current of one ampere produces a force of one volt.

Overall Diameter

Finished diameter over wire or cable

Over Current

The Current which causes and excessive temperature rise in a conductor.

Overload Capacity

The maximum level of current, voltage, or power which a device can withstand before it is damaged.

Lay Direction

The direction in which the strands of a conductor run over the top of the conductor as they recede from and observer looking along the axis of the conductor.

Leakage Current

The undesirable flow of current through or over the surface of an insulation

RFI

Radio Frequency Interference.

RG/U

Radio Government, Universal. RG is the military designation for coaxial cable and U stands for " general Utility".

Round Conductor

A conductor whose cross-section is substantially circular

Oxygen index

Percentage of Oxygen necessary to support combustion of specified material.

P

Pair

Two insulated wires of a single circuit associated together.

Peak Voltage

The maximum instantaneous voltage.

Percent Conductivity

Conductivity of a material expressed as a percentage of that of copper



Polyester

Polyethylene terephthalate which is used extensively in the production of a high strength moisture resistant film used as cable core wrapping material.

Polyethylene

A family of insulating materials derived from polymerization of ethylene gas. They are basically pure hydrocarbon resins, with excellent dielectric properties.

Polypropylene

A thermoplastic polymer of propylene.

Polyvinylchloride (PVC).

A thermoplastic material composed of polymers of vinylchloride which may be rigid or elastomeric, depending on specific formulation.

Power Factor

The ratio of resistance to impedance. The ratio of the actual power of an alternating current to apparent power. Mathematically, the cosine of the angle between the voltage applied and the current resulting.

Propagation time

The required for an electrical wave to travel between two points on a transmission line.

Pulse

A current or voltage which changes abruptly from one value to another and back to the original value in a finite length of time.

Pulse Cable

A type of coaxial cable constructed to transmit repeated high voltage pulses without degradation.

S

Sheath

The material, usually an extruded plastic or elastomer, applied outermost to a wire or cable. Very often referred to as a jacket.

Shield

A metallic layer around an insulated conductor or group of conductors to prevent electrostatic or electromagnetic interference between the enclosed wires and external fields. This shield can be braided or served wires, foil wrap, foil backed tape, a metallic tube, or conductors, the shielding effectiveness is in proportion to the amount of coverage, usually expressed in percentage.

Shield Coverage

The physical area of a cable that is actually covered by the shielding material and is expressed in percentage.

Signal

Current used to convey information, either digital, analogue, audio or video.

Single cable

A cable designed to carry current of usually less than one ampere per conductor.

Skin Effect

The tendency of alternating current, as its frequency increases, to travel only on the surface of a conductor.

Solid Conductor

A conductor consisting of a single wire.

Spark Test

A test designed to locate imperfections (usually pinholes) in a wire insulation by application of an electrical potential across the material for a short period of time while the wire is drawn through an electrode field with one end of the wire grounded.

Specific Gravity

The ratio of the weight of any volume of substance to a weight of an equal volume of some substance taken as a standard, usually water for liquids and hydrogen for gases.

Square Mil

The area of a square on mil by one mil.

Stranded conductor

A conductor composed of individual groups of wires twisted together to form an entire unit.

Strand Lay length

A distance of advance of on strand of a spirally stranded conductor, in one turn, measured axially.

Q

Quad

A four- wire unit of insulated conductors. See star quad

R

Rated Temperature

The maximum temperature at which an electric component can operate for extended periods without loss of its operating properties

Rated Voltage



The maximum voltage at which an electric component can operate for extended periods without degradation of performance or safety hazard.

Reactance

The opposition offered to the flow of alternating current by the inductance or capacitance of a component or circuit

Resistance

In D.C. circuits, the opposition a material offers to current, measured in ohms. In A.C. Circuits, resistance is the real component of impedance, and may be higher than the value measured at D.C.

T

Temperature Rating

The maximum temperature at which insulating material may be used in continuous operation without loss of its basic properties.

Tensile strength

A term denoting the greatest longitudinal tensile stress a substance can bear without mechanical failure.

Thermal Rating

The maximum and / or minimum temperature at which a material will perform its functions without undue degradation.

Thermal Shock

A test to determine the ability of a material to withstand heat and cold by subjecting it to rapid and wide change in temperature.

Tinned Copper

Tin coating over copper to aid in soldering and inhibit corrosion.

Tinned wire

Copper wire that has been coated with a layer of tin or solder to simplify soldering.

Triple (Traid)

A cable consisting of three insulated single conductors twisted together.

Tubing

A tube of extruded non-supported plastic or metallic material.

Twin Cable

A cable composed of two separated insulated stranded conductors laid parallel under a common covering.

Twin Coaxial cable

A single cable consisting of two separate coaxial cables laid adjacent and parallel or twisted together.

Twisted Pair

A twisted pair is composed of two small separately insulated wires twisted together.

Twisted Triad

Any three individually insulated conductors which are twisted together.

V

Velocity of Propagation

The speed of an electric signal down a length of cable compared to speed in free space expressed as a percentage. It is the reciprocal of the square root of the dielectric constant of the cable insulation.

Volt (potential difference)

A unit of electrical pressure. One volt is the amount of pressure that will cause one ampere of current in one ohm of resistance.

Voltage

The term most often used in place of electromotive force, potential, potential difference, or voltage drop, to designate electric pressure that exists between two points and is capable of producing a flow of current when a circuit is connected between the two points.

Voltage Drop.

The amount of voltage loss between two power in a circuit.

Voltage Rating

The highest voltage that may be continuously applied to a wire or cord in conformance with standards or specifications.

Volume Receptivity

The electrical resistance between opposite face of a 1 cm cube of insulating material, commonly expressed in ohms/centimeter.